

## Double row shrouded headers

# INTERCOM

### FEATURES

Pitch 2.54 mm  
Conforms to HE13, HE14,  
IEC 603-8

### TECHNICAL DATA

Technical data  
Material  
Housing: Black thermoplastic  
GF UL94 V0  
High temperature  
Contact: phosphor bronze.

### Electrical

Current rating: 4 A maxi.  
Voltage: 1000 V eff.  
Insulation resistance:  
1x10<sup>4</sup> MΩ mini.

### Mechanical


Temperature rating:  
-55°C to +125°C  
Pc board Hole diameter Ø 1 mm.

### PACKAGING

Recyclable cardboard boxes.

Matches with the following  
connectors:  
4783220; 4853401.

**High Temperature**

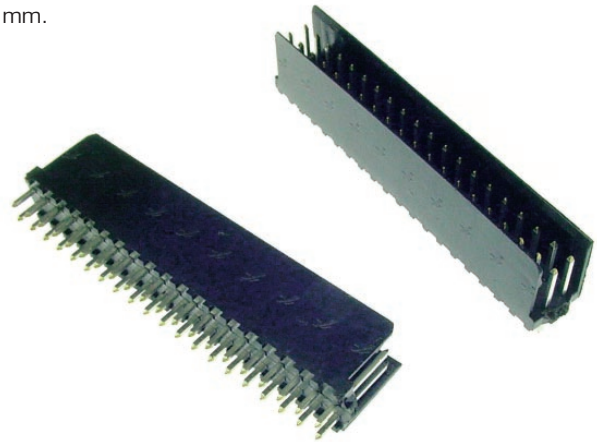

a	b	c	d	e	
475	1848	1	xx	4x0	- 1

**d** Number of contacts  
from 04 to 40

**e** Plating  
0 Gold plating  
0.2 µm over Ni 1.27 µm  
4 Tin plated 4 µm over Ni 1.27 µm  
7 Selective Gold plating  
0.2 µm over Ni 1.27 µm  
Other plating upon request

