


線軸名稱 Reel Name	外徑 D(mm)		軸徑 d(mm)		內長 W(mm)	軸長 L(mm)	穴徑 h(mm)	線徑範圍 Size Range(mm)	捲線重量 Wire weight (kg)
	D1	D2	d1	d2					
PT-1	95	100	53	58	100	120	20	0.03~0.08	1.5±0.5
PT-2	102	112	60	67	150	166	20	0.05~0.12	2.0±0.6
PT-4	124	140	74	86	170	200	26	0.06~0.16	4.0±1.2
PT-10	160	180	96	110	200	230	30	0.08~0.30	10.0±8.0
PT-15	180	200	96	110	200	230	30	0.12~0.5	15.0±4.5
PT-20A	210	230	132	150	250	280	34	0.16~0.5	20.0±5.0
PT-25	215	230	110	130	250	280	30	0.2~0.8	28.0±5.0
PT-40	230	260	136	160	300	336	40	0.4~2.0	40.0±10.0
PT-60	270	300	150	175	350	400	45	0.6~2.6	60.0±15.0
PT-90	300	315	180	200	424	500	100	0.6~3.2	90.0±25.0
PT-200	375	400	215	240	530	630	100	1.0~3.2	200.0±50.0
PT-270	435	460	255	280	530	630	100	1.6~3.2	270.0±60.0

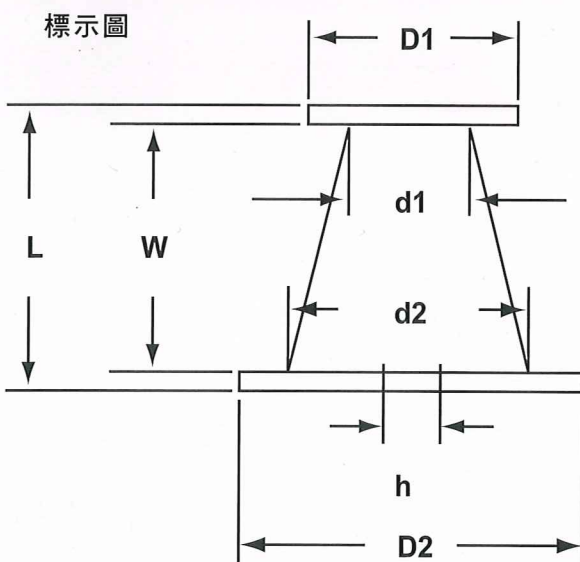

耐高溫有色漆包線 Heat Resistant Magnet Wire