


**Specification:**

- Frequency Range: 868 / 915 / 900 / 922MHz
- Return Loss: -9.8db or less
- VSWR: 1.50 or less
- Gain (peak): 5.0 dBi
- Polarization: Vertical
- Radiation: Omni-directional
- Max. Power: 40W
- Lightning Protection: DC Ground

CH1 A/R SWR      MKR 1: 1.2911 U  
REF 1.000 U      1.000U/ 915 000 000.HZ

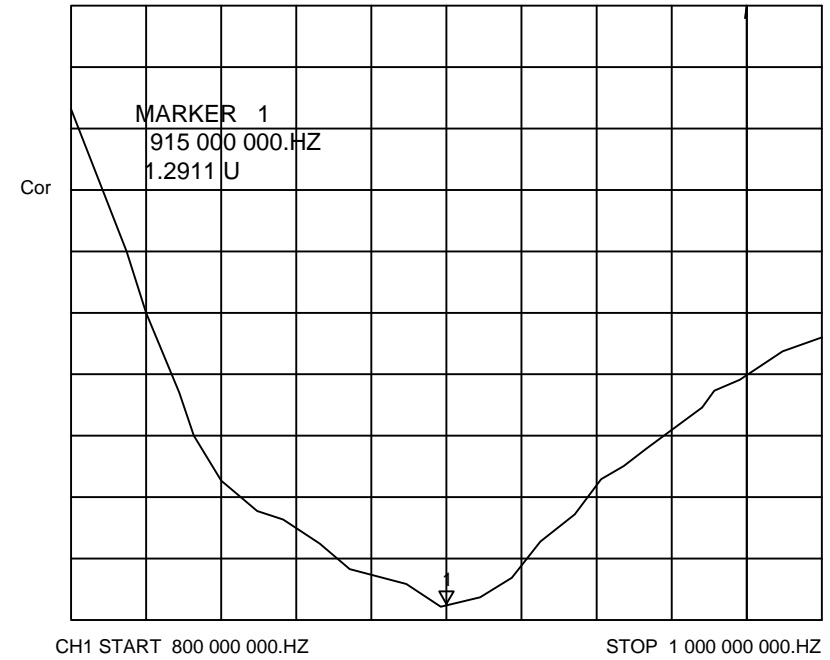

KM-041060-922-CYAN	922	CYAN
KM-041060-915-BLK	915	Black
KM-041060-900-XXX	900	XXX
KM-041060-868-BLK	868	Black
Part Number	Freq. (MHz)	Color

3	Connector	1	SMA (M) Plug	Black
2	Cable	1	RG316	Brown
1	Body	1	TPE + UV	See Table
No.	Description	QTY	Material	Finish

**RoHS  
Compliant**

© THIRD ANGLE PROJECTION

\* MAJOR DIMENSION  
UNLESS OTHERWISE  
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED  
**JOHN**

CHECKED  
**TERRY**

DRAWN  
**KEVIN**

DRAWN DATE  
22 Feb. 2024

**KM** KeMy Electronic Technology Inc.

TITLE  
**868 / 900 / 915 / 922 MHz Antenna,  
SMA (M) Plug**

DRAWING NO. **KM-041060-XXX-XXX**

REV  
0