



Single row shrouded headers

INTERCOM

FEATURES

Pitch 2.54 mm
 Conforms to HE13, HE14,
 IEC 603-8.

TECHNICAL DATA

Material
 Housing: Black thermoplastic
 GF UL94 V0
 High temperature
 Contact: phosphor bronze.

Electrical

Current rating: 4 A maxi.
 Voltage: 1000 V eff.
 Insulation resistance:
 1x10⁴ MΩ mini

Mechanical

Temperature rating:
 -55°C to +125°C
 Pc board Hole diameter Ø 1 mm.


PACKAGING

Recyclable cardboard boxes

Mates with the following
 connectors:

4782863; 4782709; 4782837;
 4782710; 4783219; 4853248.


High Temperature

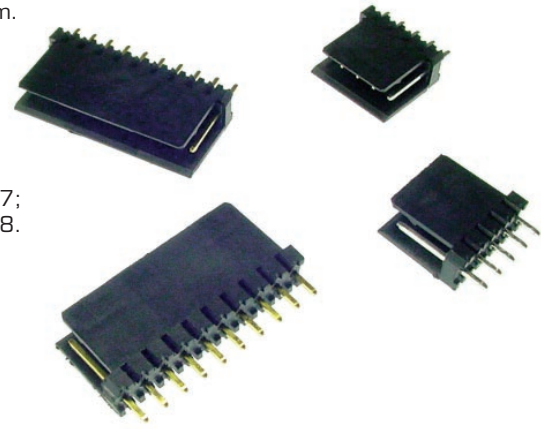

a	b	c	d	e	
475	0334	1	xx	4x0	- 1

d Number of contacts
 from 02 to 20.

e Plating
 0 Gold
 0.2 µm over Ni 1.27 µm
 4 Tin 4 µm over Ni 1.27 µm
 7 Selective Gold
 0.2 µm over Ni 1.27 µm
 Other platings on demand.

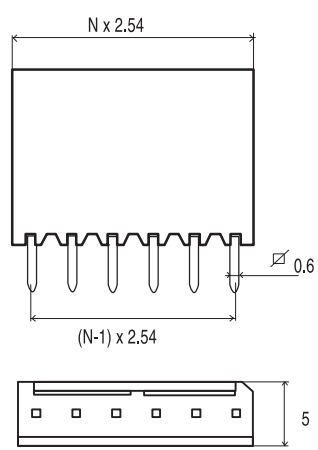

For alternative products
 see also page 130.