


JVT2546H506T-2\*XXP-S  
 塑胶高度:5.0mm  
 6T-PA6T  
 S-SMT  
 P-带柱  
 PIN数

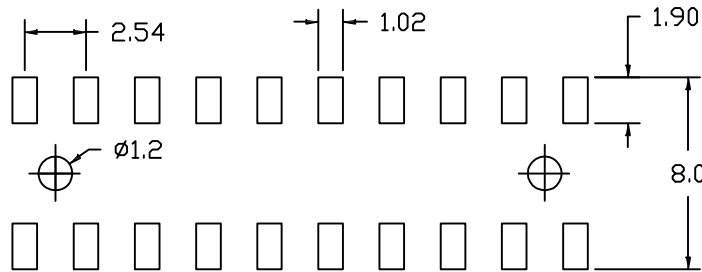

PCB LAYOUT

**SPECIFICATIONS**

**Material:**

Insulator: Glass filled PA6T (UL94V-0),Black

Contacts: Brass

Contact Plating: Au or Sn over 50 u' Ni

Plating: 1u" Au

**Electrical Characteristics:**

Contact Resistance: 20mΩ Max.

Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 1000V

Current Rating: 3 AMP

Operating Temperature: -40°C to +105°C

未注公差按公差分段要求

Position Dimension	2 thru 40	GENERAL TOLERANCE
A±0.30	2.54 * No. of Positions+0.5	0 ±0.35
B±0.25	2.54 * No. of Contacts-2.54	.0 ±0.30
		.00 ±0.20
		.000 ±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140514
----	------	----	----	----	----	-----	----	----------

核准	审核	绘图	品名	2.54双排排母H5.0 SMT 带柱
	CHEN	TONY	料号	JVT2546H506T-2*XXP-S
			图名	100 版本 A

