

# 3.0mm(.118") Dual Row Right Angle Header

## MATERIAL

Insulator: Nylon 6T  
 Color: Black  
 Contact: Brass 0.64mm(.025")square pins  
 Plating: Tin plated

## SPECIFICATIONS

Current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

Voltage rating: 250V  
 Dielectric withstand voltage: 1500V AC  
 Contact resistance: 0.01Ω max.  
 Temperature rise: 30°C Max.  
 (carry rated current load)





## Order Information

R 2661-D3-xx T R- Y  
 1 2 3 4 5 6

1. RoHS
2. Series
3. PIN No.
4. Tin plated
5. Right Angle
6. With post

## Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	—	6.65(0.262)	14	18.00(0.709)	24.65(0.970)
4	3.00(0.118)	9.65(0.380)	16	21.00(0.827)	27.65(1.089)
6	6.00(0.236)	12.65(0.498)	18	24.00(0.945)	30.65(1.207)
8	9.00(0.354)	15.65(0.616)	20	27.00(1.063)	33.65(1.325)
10	12.00(0.472)	18.65(0.734)	22	30.00(1.181)	36.65(1.443)
12	15.00(0.591)	21.65(0.852)	24	33.00(1.299)	39.65(1.561)

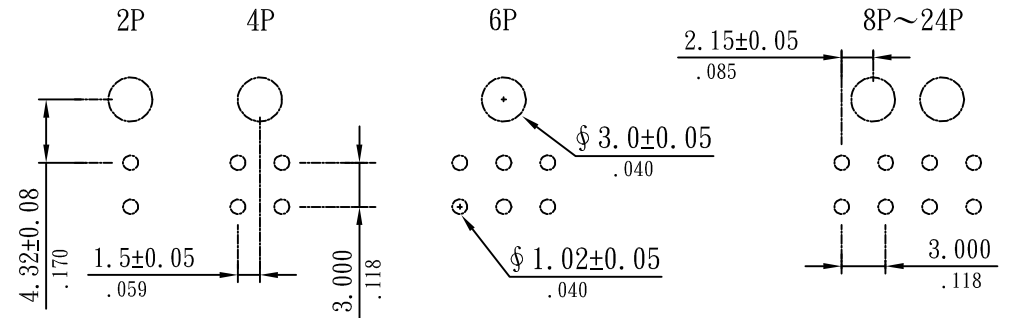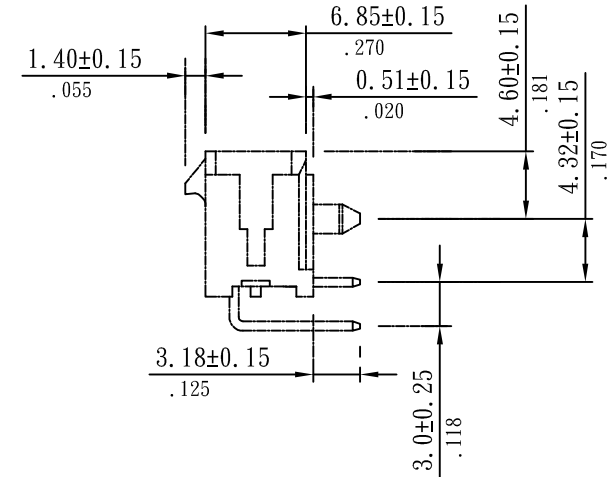

PCB Layout:Component side

**Sunny Young Enterprise Co., Ltd.**  
 S. Y. E <http://www.sunnyyoung.com.tw>  
 No. 276, Nan Yang St., Hsi-Chih City, 221, Taipei County, Taiwan  
 Tel:+886 2 2694 5995(REP) Fax:+886 2 2694 3721

PART NO R2661-D3-XXTR-Y(RoHS)

CHECKED	APPROVED	SCALE: 1:2	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED
	PC	UNIT: mm(in.)	A					.0 ±0.30(.012)
DRAWN NAME	DATE	CAD NO	B					.00 ±0.20(.008)
QYJ(M044)	2011.02.24	R2661-D3-XXTR-Y	C					.000±0.10(.004)
PROJECTION:								