

Features Crimp contact for single and double row housing
Double Wipe Removable contact
AWG 22 - 24 - 26 - 28

Material Material: Phosphor bronze

Electrical Current rating: 3 A maxi
Contact resistance: 20 mΩ maxi


Mechanical Temperature rating:
-55 °C to 125 °C
Maximum Insulation
Diameter: Ø 1.45 mm

Packaging Recyclable cardboard reels
Tooling P/n: Crimping

Product Code

A	B	C	D	E
485	3250	000	4x	x

D	Plating 2 Tin 4 μm 7 Selective gold 0.2 μm over 1.27 μm Ni
E	Packaging 1 reel (8000 contacts each) 2 reel (1000 contacts each)

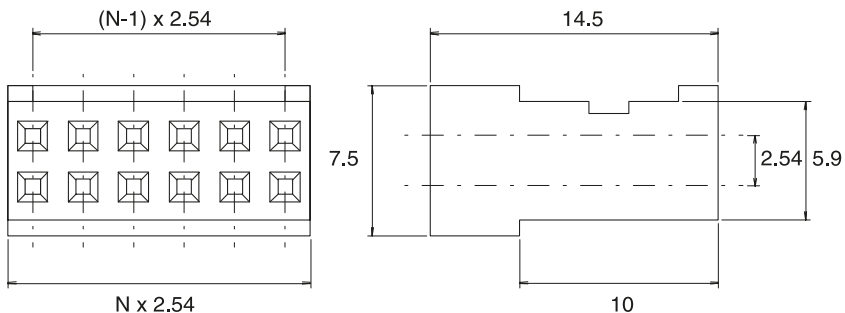

Features Double row housing
for crimping contact
Double Wipe Removable
contact AWG 22 - 24 - 26 - 28

Material Insulator:
Black glass filled polyester UL 94V0

Electrical Current rating: 3 A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 1000 MΩ mini
Contact resistance: 20 mΩ maxi

Mechanical Temperature rating:
-40 °C to 125 °C
Maximum Insulation
Diameter: Ø 1.45 mm

Packaging Recyclable cardboard boxes

Product Code

A	B	C	D
485	3401	0xx	740

C	Number of contacts 08 or 10
----------	-----------------------------