
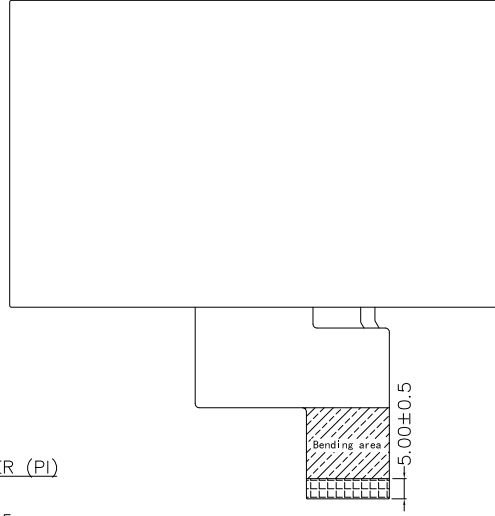
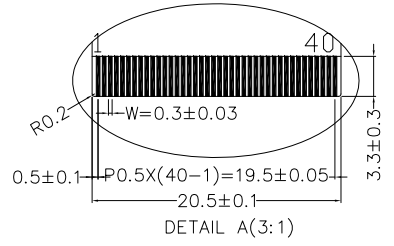



CUSTOMER P/N:

Rev.	DATA	NOTES
V1.0	2019.04.30	New issue

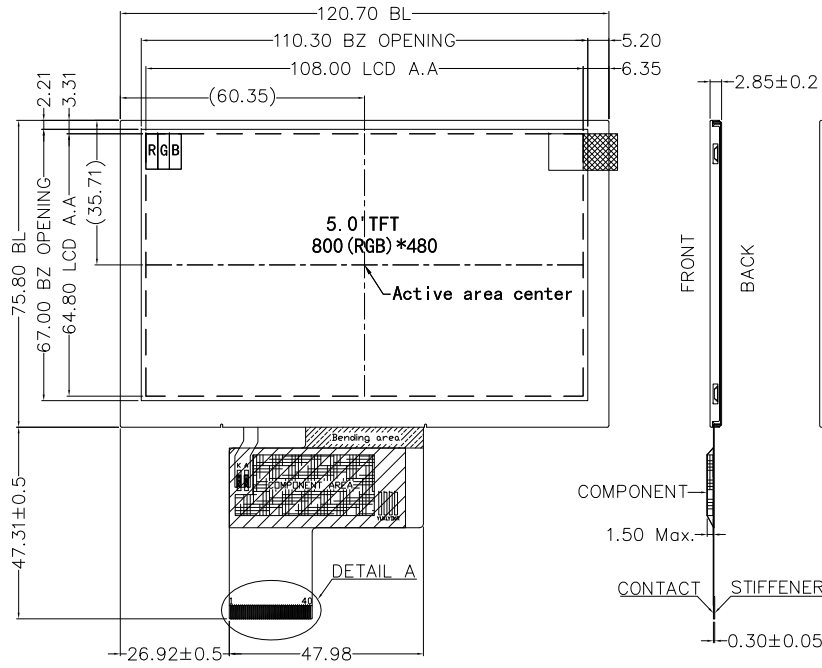

1	LED-K
2	LED-A
3	NC
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

- NOTES:
- 1.DISPLAY TYPE: 5.0" IPS
  - 2.DISPLAY MODE: TRANSMISSIVE, Normally Black
  - 3.VIEW DIRECTION: ALL
  - 4.OPERATION TEMPERATURE: -30°C~+80°C  
STORAGE TEMPERATURE: -30°C~+80°C
  - 5.GENERAL TOLERANCE: ±0.2
  - 6.DISPLAY DRIVER IC: ST7262
  - 7.REQUIREMENT ON ENVIRONMENT PROTECTION:  
ROHS

Customer Approval	Drawn:	<b>DLC Display Co., Ltd</b>			
	Checked:				
	Approved:	Title	TFT LCM OUTLINE	Unit	mm
	Critical Dim.	Part No.	DLC0500ACP20RF-1	Scale	1:1
	Reference Dim.	Revison	V1.0	Page	1/1
	Date	2019-04-30	3 <sup>rd</sup> Angle		