


1

$2.0 * \text{No.of contacts}/2 - 2.00$



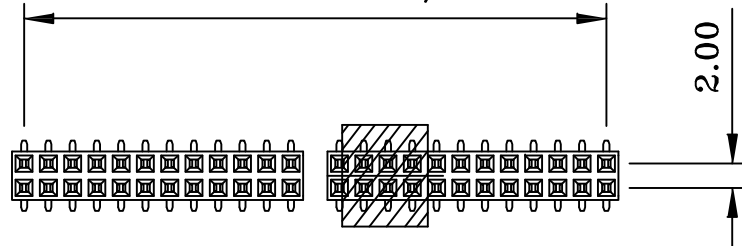


SPECIFICATION


- Current Rating: 2Amp
- Dielectric Withstanding: 500V AC
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Operating Temperature: -40° C ~ +85° C
- Max Processing Temp: 230° C for 60 seconds
260° C for 10 seconds
- Contact Material: Phosphor Bronze
- Insulation Material: Polyester, UL 94V-0
Standard: Nylon-6T
- Finish: Tin, Gold Plated
Standard: Gold Flash all over

2

$2.0 * \text{No.of contacts}/2 + 0.5$

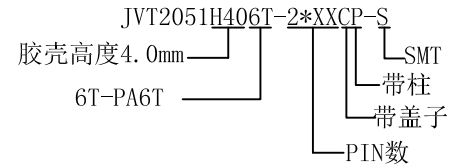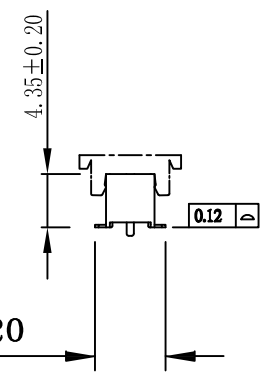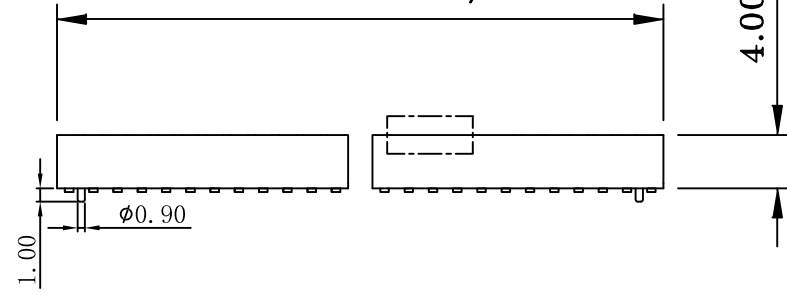


3

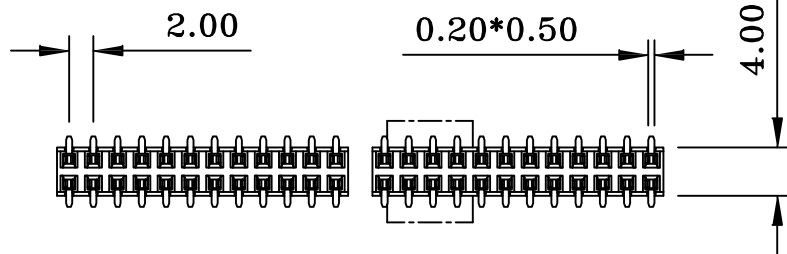

Dim.A 6.15±0.20

Recommended P.C. Board SMD Layout

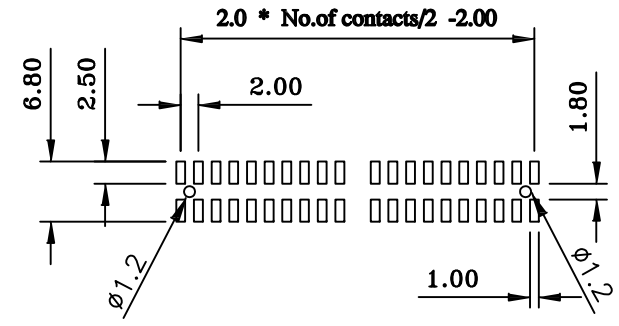

4

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20130514
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	2.0排母H4.0 双排180° SMT 带柱/盖子		
	CHEN	李勇军	料号	JVT2051H406T-2*XXCP-S		
			图名	004	版本	A