

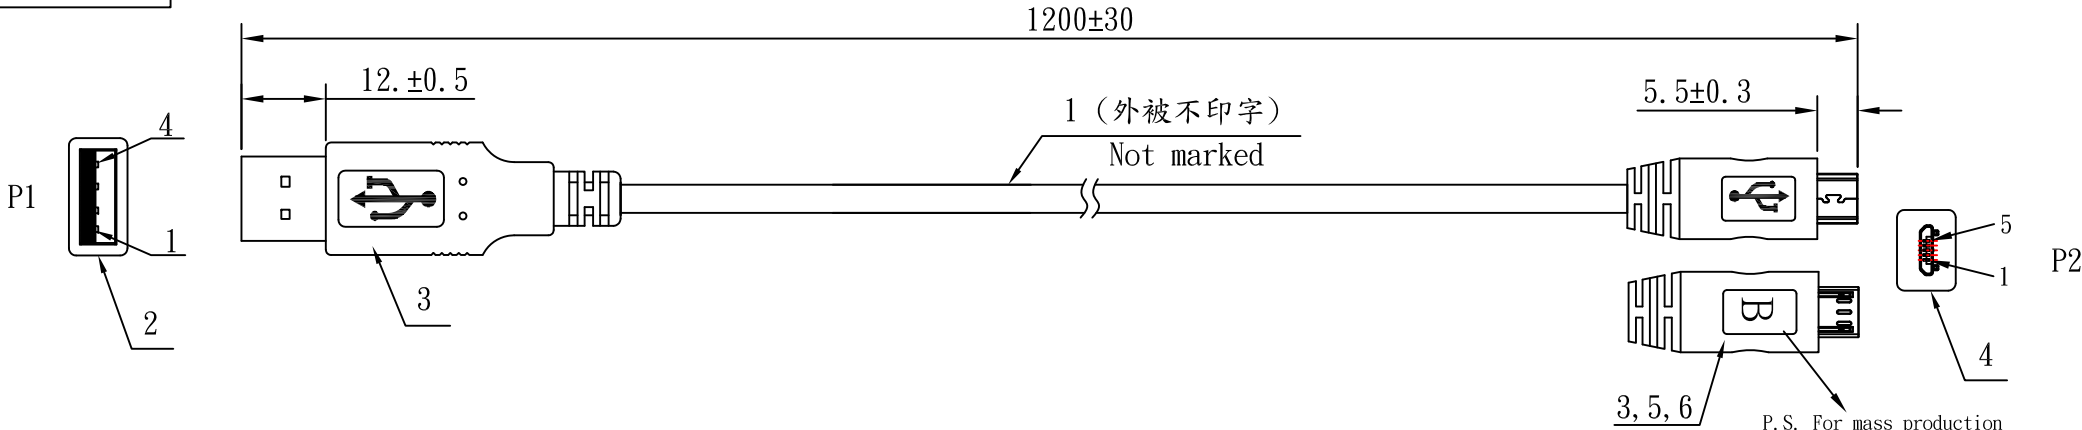


RoHS

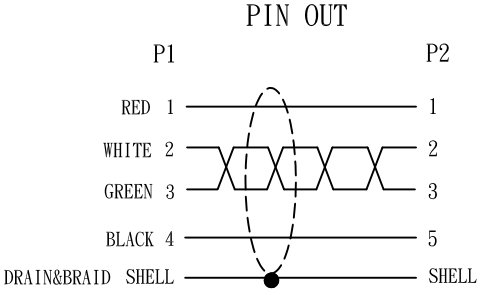

NO.	NAME	DESCRIPTION	Q' TY	SUPPLIER
1	CABLE	USB 2.0 CABLE UL2725#28x1P+#28x2C+AEB, OD: 4. 2mm, C=WHITE L=1185mm	1	
2	CONNECTOR	USB A TYPE MALE GOLD PLATING, PIERCED TYPE, WHITE INSULATOR	1	
3	PVC	PVC-WHITE39/80P	2	
4	CONNECTOR	MICRO USB B TYPE MALE, GOLD PLATING, PIERCED TYPE, BLACK INSULATOR	1	
5	TAPE	HI TEMP TAPE: W:6mm	1	
6	H. S. T.	R4100-010005 BLACK 1.0 ϕ x5mm	3	
7	MINI TIE	TIE-A/WHITE	2	

NOTE:PACKING:1PC/BAG (5"x6"x0.06mm)
 ELECTRICAL TEST CONDITIONS:
 1. 100% OPEN SHORT-TEST
 2. INSULATION RESISTANCE:10M OHM Min.
 3. CONDUCTION RESISTANCE:3 OHM Max.
 4. HI-POT:DC 300 V / 10 ms

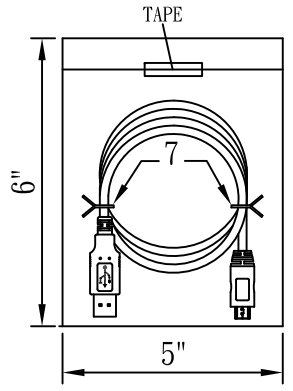

Sunny Young Enterprise Co., Ltd.
 S. Y. E <http://www.sunnyyoung.com.tw>
 13F., No.116, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
 Tel:+886 2 2696 1668(REP) Fax:+886 2 2696 2668

PART NO	RE193-USB1200-WHT	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	WORKING SIGNATURE
		DRAWN	侯家明	2017. 02. 09	UNIT: mm(in.)	A				
		CHECKED	吕克英	2017. 02. 09	CAD NO	B				
		APPROVED	江慕微	2017. 02. 09	RE193-USB1200-WHT	C				