

COMOSS


RoHS

COMOSS ELECTRONIC CO., LTD.

DATE :	Feb/29/12'
CMS P/N :	
Dwg.No :	
CUST. P/N :	DE09M-DE09F-300mm
CUSTOMER :	
DESCRIPTION	DE09M-DE09F-300mm
APPROVE:	

REV.	DATE	DESCRIPTION	BY
1.0	Feb/29/12'		Eve

■ CONFIGURATION

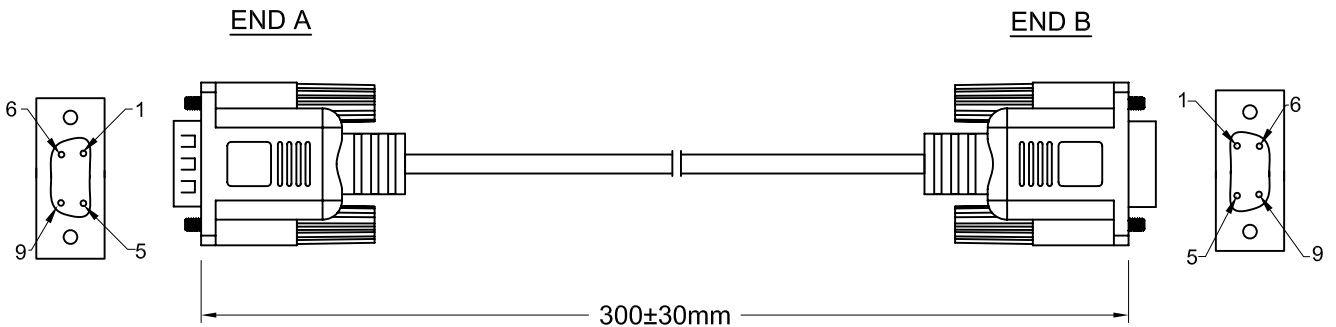

■ SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold Flash	MOLD No.	CMS-0906	SHIELD'G	Al Foil
CONNECTOR TYPE	DS-G09M-031C1			T. SCREW	Thumb Screw #4-40 Black Size :8.0x39.0x23.0x12.0


2. END B

CONT. PLATING	Gold Flash	MOLD No.	CMS-0906	SHIELD'G	Al Foil
CONNECTOR TYPE	DS-G09F-031C1			T. SCREW	Thumb Screw #4-40 Black Size :8.0x39.0x23.0x12.0

3. WIRES

WIRE GAUGE	24Awg	LENGTH	300+20-0mm	SHIELD'G	AE
CONDUCTORS	9C	COLOR	Black	UL/CSA	UL2464
JACKET MAT'L	PVC	INS. MAT'L	SR-PVC	WIRE O.D.	5.5mm

4. CONNECTOR PIN OUT

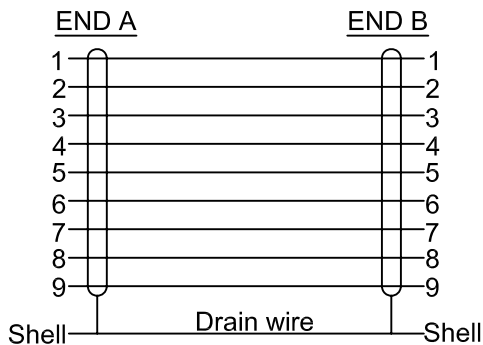

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P,Black(RoHS).