





PIN DESCRIPTION

1	IM0	25	DB2
2	IM1	26	DB1
3	IM2	27	DB0
4	IM3	28	SDO
5	RESET	29	SDI
6	VSYN	30	RD
7	HSYN	31	WR/SCL
8	DOTCLK	32	RS
9	ENABLE	33	CS
10	DB17	34	FMARK
11	DB16	35	IOVCC
12	DB15	36	VCC
13	DB14	37	VCI
14	DB13	38	GND
15	DB12	39	X+(NC)
16	DB11	40	Y+(NC)
17	DB10	41	X-(NC)
18	DB9	42	Y-(NC)
19	DB8	43	LEDA
20	DB7	44	LEDK1
21	DB6	45	LEDK2
22	DB5	46	LEDK3
23	DB4	47	LEDK4
24	DB3		

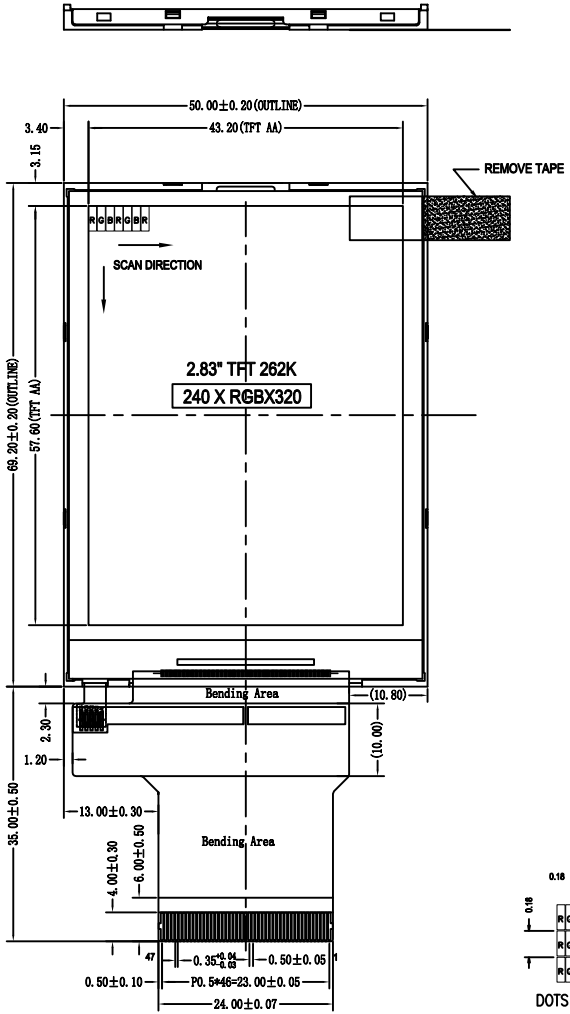

BEND REFERENCE DRAWING  
SPREAD SHIPMENT

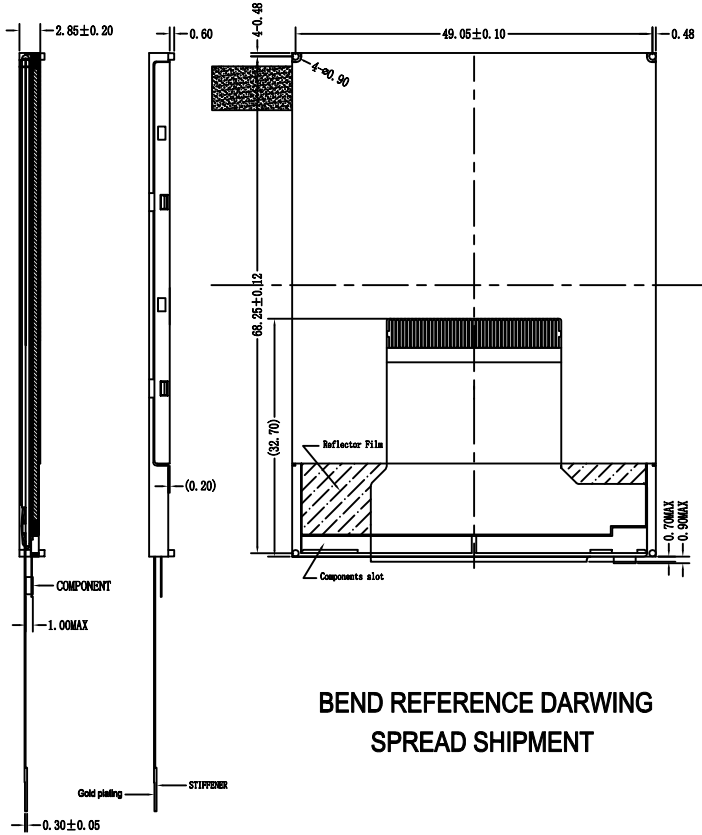

NOTES:

1. DISPLAY TYPE: a-Si TFT
2. DISPLAY MODULE: Transflective ,Normally White
3. OPERATING TEMP.: -20° C---+70° C
4. STORAGE TEMP: -30° C---+80° C
5. Backlight: LED
6. RoHS Complicant

DLC Display Co., Limited www.dlcdisplay.com		
DRAWN BY:	TITLE: DLC0283BUG-2	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:		SHEET NO: OF