

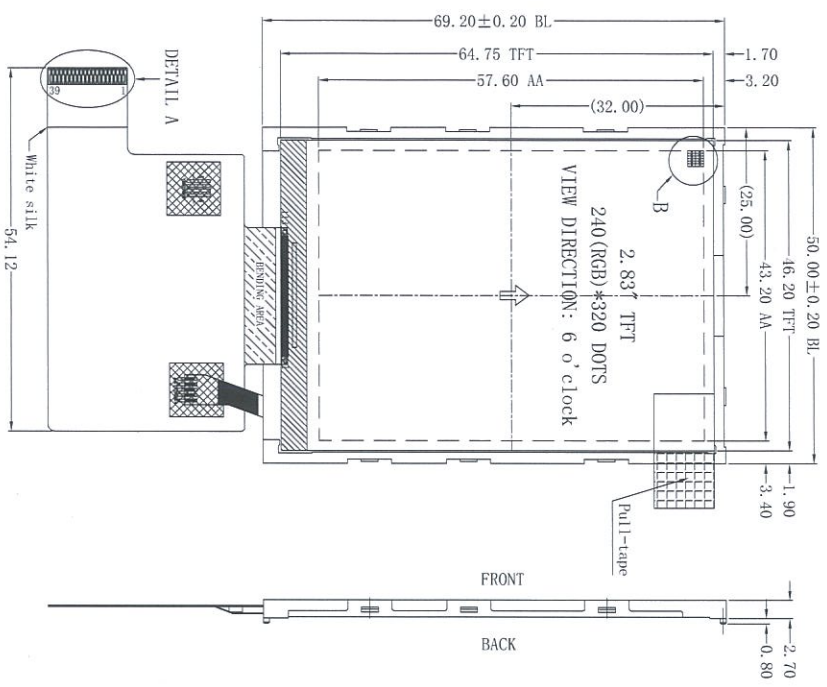


CUSTOMER P/N:

Rev.	DATE	NOTES
V1.0	2016.11.21	New issue
V2.0	2016.12.22	Modify the brightness, FPC & DST design
V2.1	2020.06.29	Modify the DST design at the backside

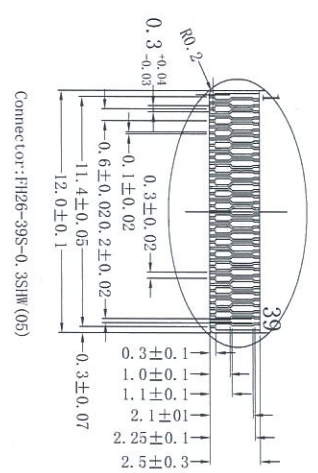

**APPROVED**

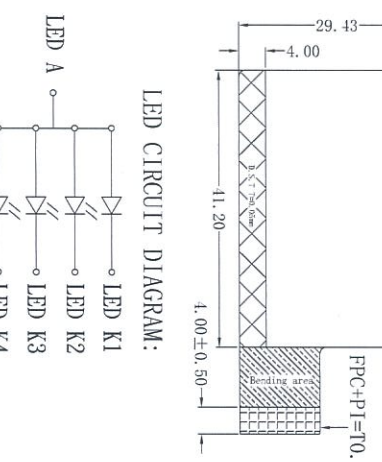

PIN ASSIGNMENT:

No.	PIN NAME
1	VDD
2	VDD1
3	RESET
4	CS
5	RS
6	WR
7	RD
8	GND
9	NC
10	NC
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	DB8
20	DB9
21	DB10
22	DB11
23	DB12
24	DB13
25	DB14
26	DB15
27	DB16
28	DB17
29	LEDA
30	LEDA1
31	LEDA2
32	LEDA3
33	LEDA4
34	GND
35	XR
36	XL
37	YU
38	YD
39	NC

- NOTES:
- 1.DISPLAY TYPE: 2.83" TFT
  - 2.DISPLAY MODE: TM with Normally White
  - 3.VIEW DIRECTION: 6 o'clock
  - 4.OPERATION TEMPERATURE: -20°C~+70°C
  - 5.GENERAL TOLERANCE: ±0.2
  - 6.DRIVER IC: ILI9341V
  - 7.LCM LUMINANCE: 350 cd/m<sup>2</sup> (Typical)
  - 8.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS

Customer Approval	Drawn:	<b>DLC Display Co., Ltd</b>	
Checked:	Approved:		
Critical Dim.	Reference Dim.		
Title	TFT LCM OUTLINE	Unit	mm
Part No.	DLC0283QZC	Scale	1:1
Revision	V2.1	Page	1/1
Date	2020-06-29	3 <sup>rd</sup> Angle	