


NOTES:

- 1.DISPLAY TYPE: a-Si TFT
- 2.DISPLAY MODULE: Transmissive ,Normally White
- 3.OPERATIN TEMP: -20° C---+70° C
- 4.STORAGE TEMP: -30° C---+80° C
- 5.Backlight: LED
6. RoHS Complicant

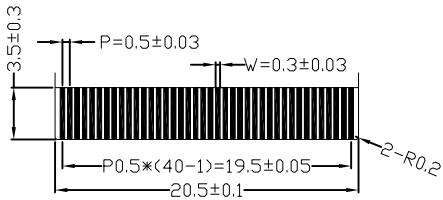

DETAIL "A" (S=3:1)

PIN FUCTION	
PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	NC
33	NC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

1. LED CIRCUIT DIAGRAM:



DLC Display Co.,Limited
www.dlccdisplay.com

DRAWN BY:	TITLE:DLC0430EZG-T-7	
CHECKED BY:	DWG NO:	SCALE:
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	DWG NO:	SHEET NO: 0F

Outline Drawing



DLC Display Co.,Limited

MODEL No.:DLC0430EZG-T-7