



1

2.0\*No.of Contacts/2 ±0.30

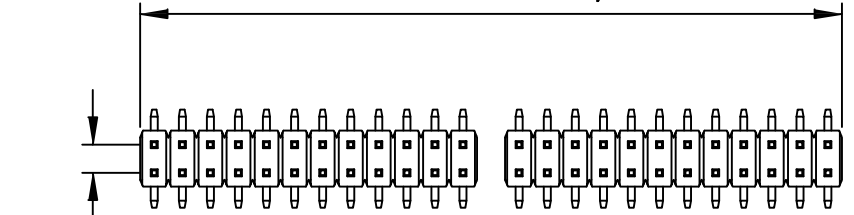


2

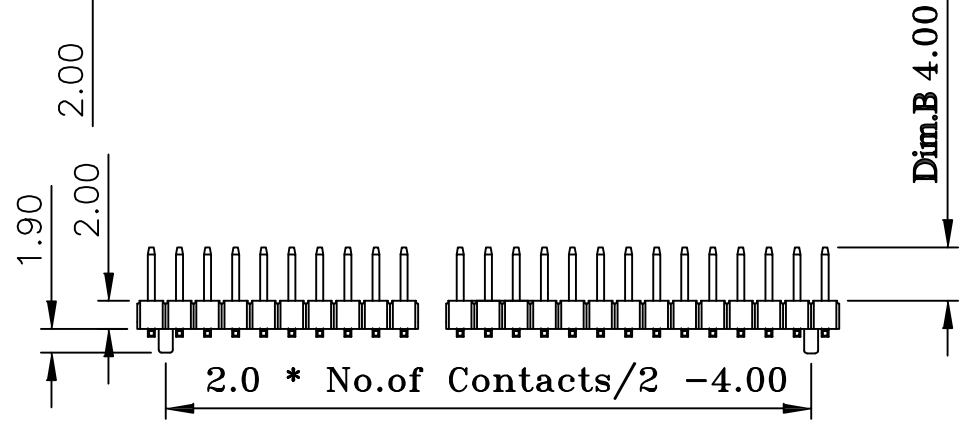

Dim.B 4.00


Dim.A 6.20



Dim.C 2.50

3


2.0\*(No.of Contacts/2-1)

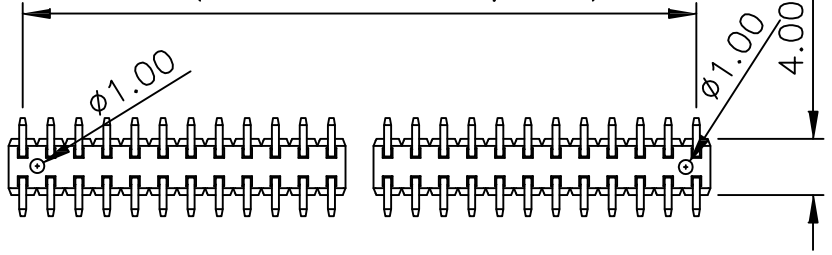


4

**SPECIFICATION**

Current Rating: **2 Amps**  
 Insulator Resistance: **1000 Megohms min**  
**Contact Resistance: 20 m ohms max**  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: **-40° ~ +85° C**  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: **260° C for 10 seconds**  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

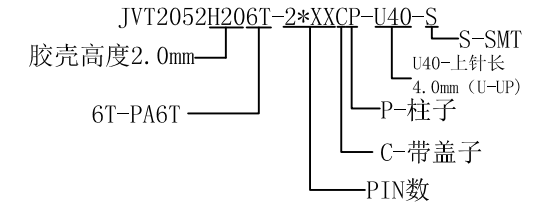

Recommended P.C. Board  
SMD Layout

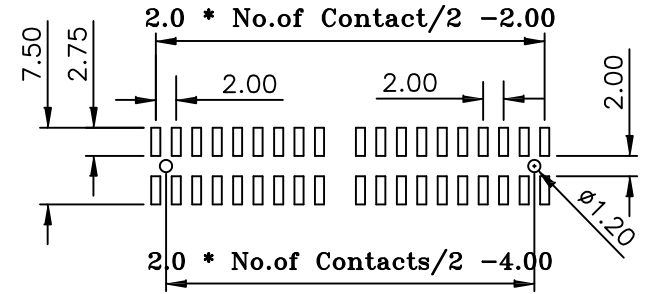

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20141214
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	2.0mm排针H2.0 双排 带盖带柱 SMT		
	陈宁亮	李勇军	料号	JVT2052H206T-2XXCP-U40-S		
			图名	004	版本	A