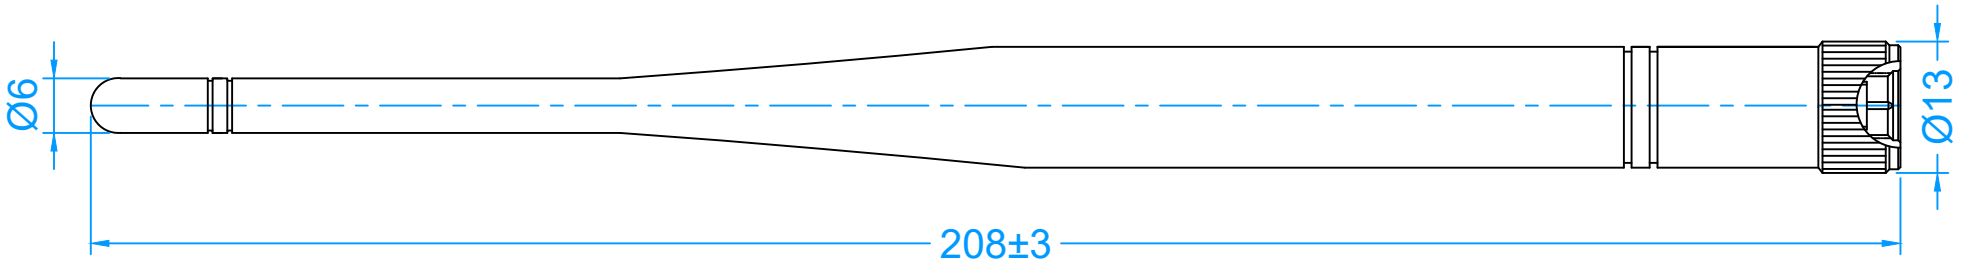

Specification:
Frequency Range: 868 / 915 / 900 / 922MHz
Return Loss: -9.8db or less
VSWR: 1.50 or less
Gain (peak): 5.0 dBi
Polarization: Vertial
Radiation: Omni-directional
Max. Power: 40W
Lightning Protection: DC Ground

Part Number	Freq. (MHz)	Color
KM-041060-922-CYAN	922	CYAN
KM-041060-915-BLK	915	Black
KM-041060-900-XXX	900	XXX
KM-041060-868-BLK	868	Black

No.	Description	QTY	Material	Finish
3	Connector	1	SMA (M) Plug	Black
2	Cable	1	RG316	Brown
1	Body	1	TPE + UV	See Table

RoHS Compliant

* MAJOR DIMENSION
UNLESS OTHERWISE NOTED TOLERANCES

THIRD ANGLE PROJECTION | SCALE 1:1 | UNIT MM

APPROVED JOHN
CHECKED TERRY
DRAWN KEVIN
DRAWN DATE 22 Feb. 2024

KM KeMy Electronic Technology Inc.

TITLE
868 / 900 / 915 / 922 MHz Antenna, SMA (M) Plug

DRAWING NO. KM-041060-XXX-XXX
REV 0

All rights reserved. www.dgkemy.com