


**Specification:**  
 Frequency Range: 868 / 915 / 922MHz  
 Return Loss: -9.8db or less  
 VSWR: 1.50 or less  
 Gain (peak): 5.0 dBi  
 Polarization: Vertical  
 Radiation: Omni-directional  
 Max. Power: 40W  
 Lightning Protection: DC Ground

CH1 A/R SWR      MKR 1: 1.2911 U  
 REF 1.000 U      1.000U/ 915 000 000.HZ

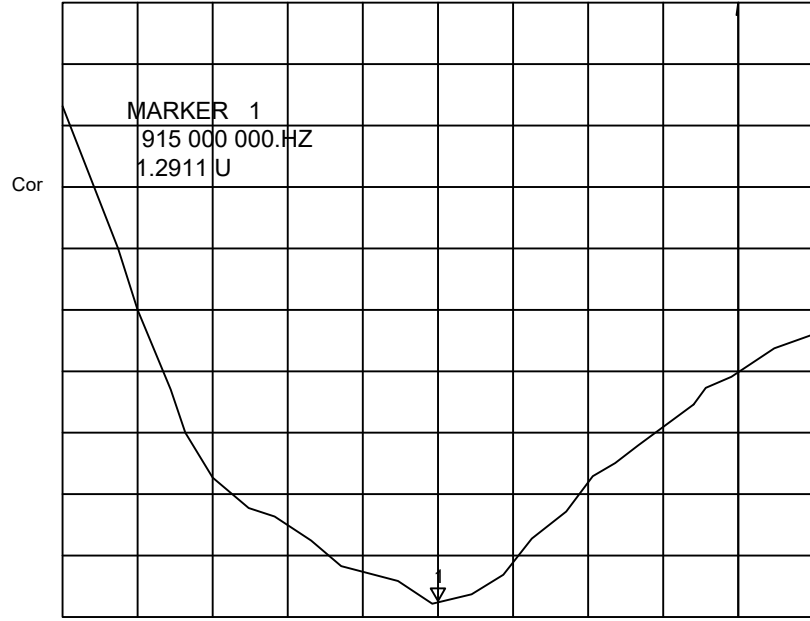

CH1 START 800 000 000.HZ      STOP 1 000 000 000.HZ

KM-041060-922-CYAN	922	CYAN
KM-041060-915-BLK	915	Black
KM-041060-868-BLK	868	Black
Part Number	Freq. (MHz)	Color

4	Connector	1	SMA (M) Plug	Black
3	Cable	1	RG316	Brown
2	Antenna Base	1	PC+ABS	Black
1	Antenna Body	1	TPE	Black / CYAN
No.	Description	QTY	Material	Finish
8				
7				
6				

RoHS  
Compliant

THIRD ANGLE PROJECTION

\* MAJOR DIMENSION  
 UNLESS OTHERWISE  
 NOTED TOLERANCES

SCALE 1:1    UNIT MM

APPROVED **JOHN**  
 CHECKED **TERRY**  
 DRAWN **Kevin**  
 DRAWN DATE July 09, 2017

**KM** KeMy Electronic Technology Inc.  
 TITLE 868 / 915 / 922 MHz Antenna,  
 SMA (M) Plug  
 DRAWING NO. **KM-041060-XXX-XXX**

REV 0

All rights reserved. www.dgkemy.com