

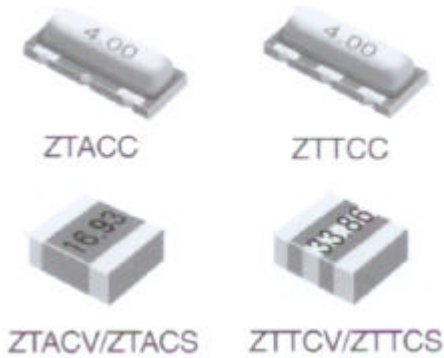
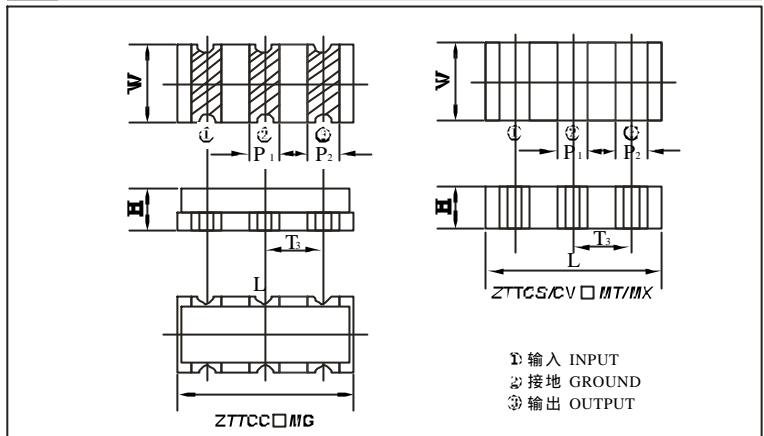
CERAMIC RESONATOR
陶瓷谐振器

 ZTACC/CS/CV□MG/MT/MX
 ZTTCC/CS/CV□MG/MT/MX

Series of Ceramic Resonator (Chip Type)

2.00-50.0MHz

系列片式陶瓷谐振器


⊕ DIMENSIONS(Unit:mm) 外形尺寸 (ZTT Series)

⊕ PRINCIPALPARAMETERS 主要参数

Model 型号	Frequency Range 频率范围 (MHz)	Frequency Accuracy 频率精度 (+25°C)	Temperature Stability 温度稳定性 (-20°C ~ +80°C)	Aging(TenYears) 老化性 (10年)
ZTACC□MG ZTTCC□MG	2.00-6.99	± 0.5%	± 0.3%	± 0.3%
ZTACS/CV□MT/MX ZTTCS/CV□MT/MX	7.00-13.00	± 0.5%	± 0.4%	± 0.3%
	13.01-50.00		± 0.3%	

⊕ DIMENSION DATA

Code 标记 Model 型号	Dimensions(Unit:mm) 外形尺寸 (单位:毫米)								
	L	W	H	P ₁	P ₂	T ₁	T ₂	T ₃	W ₁
ZTACC/ZTTCC□MG	7.4 ± 0.3	3.4 ± 0.3	1.8 ± 0.3	1.2 ± 0.3	1.2 ± 0.3	1.5 ± 0.3	1.7 ± 0.3	2.5 ± 0.3	4.0 ± 0.3
ZTACS/ZTTCS □MT/MX	4.7 ± 0.2	4.1 ± 0.2	1.6 ± 0.3	1.0 ± 0.4	0.8 ± 0.4	1.3 ± 0.2	0.8 ± 0.2	1.95 ± 0.2	5.1 ± 0.2
ZTACV/ZTTCV □MT/MX	3.7 ± 0.2	3.1 ± 0.2	1.2 ± 0.3	0.9 ± 0.3	0.7 ± 0.3	1.0 ± 0.2	0.7 ± 0.2	1.5 ± 0.2	4.1 ± 0.2

 注: ZTA系列产品无中间(接地)电极
 Note: NomiddleterminalforZTAseries