

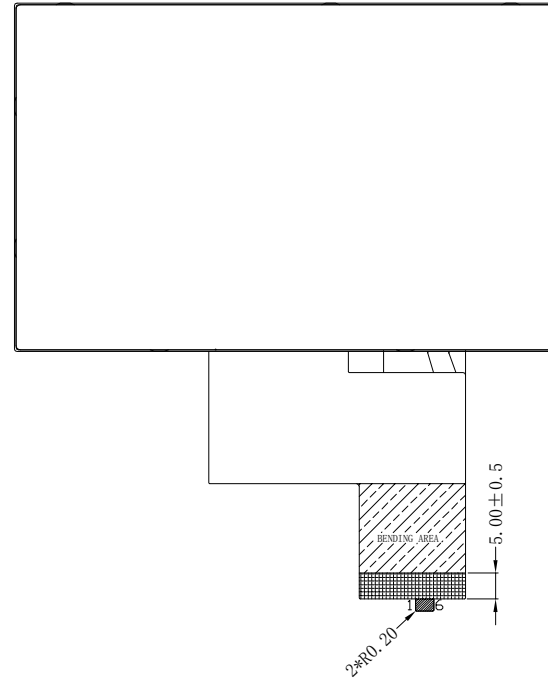


DETAIL "A" (S=3:1)

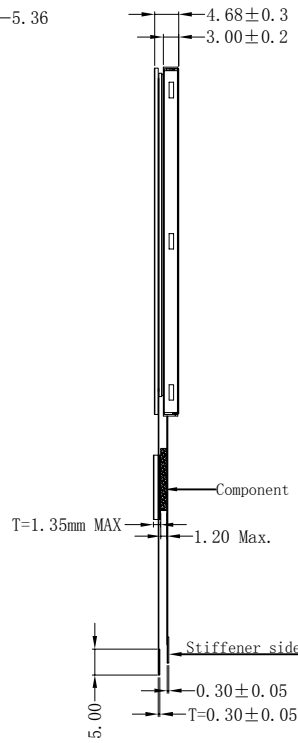

PIN FUCTION	
PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	NC
33	NC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

LED CIRCUIT DIAGRAM:



NOTES:

1. DISPLAY TYPE: 4.3TFT, TRANSMISSIVE
2. VIEWING DIRECTION : 12 O' CLOCK
3. Driver IC : ILI6480
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ±0.2
6. RoHS Complicant

DRIVER IC : FT5216

TP PIN NO	DINFINATION
1	GND
2	SDA
3	CSL
4	VDD
5	INT
6	XRES

DLC Display Co., Limited

www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0430E2ZG-T-11	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	