
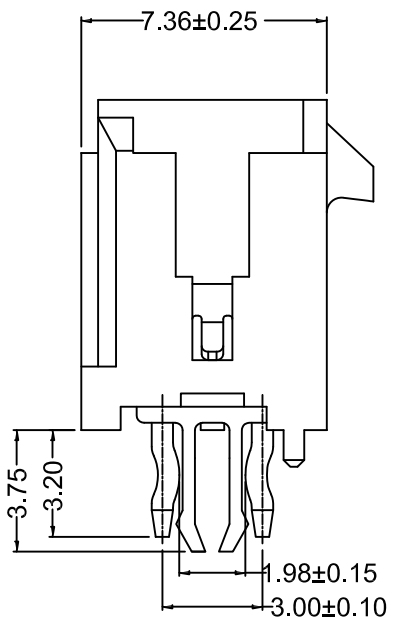
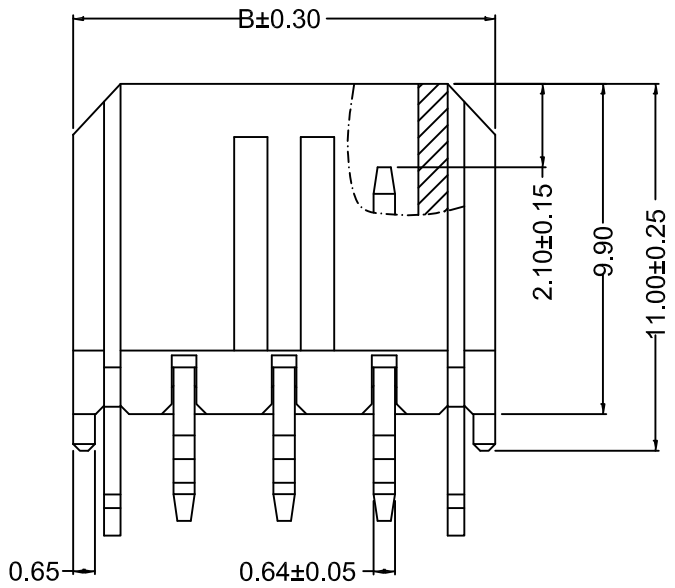


P.C.B LAYOUT

- Specifications :**
- Voltage rating: 250V AC / DC
 - Current rating: 5A AC / DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥1000M Ω
 - Contact resistance: ≤10m Ω
 - After environmental testing : ≤20mΩ
- WAFER**
- Material: Base: LCP/PA9T UL94V-0
pin: Brass Tin-plated

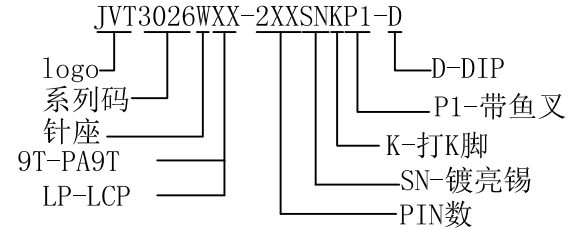

Poles	Dimensions (mm)	
	A	B
02	--	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140724
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	MX3.0mm 180° WAFER 打K 带鱼叉		
	陈宁亮	李勇军	料号	JVT3026WXX-2XXSNKP1-D		
			图名	054	版本	A