
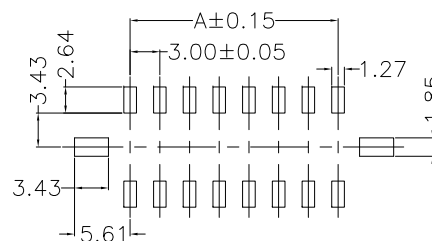
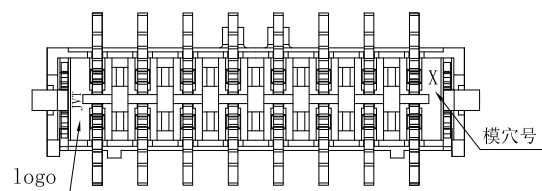
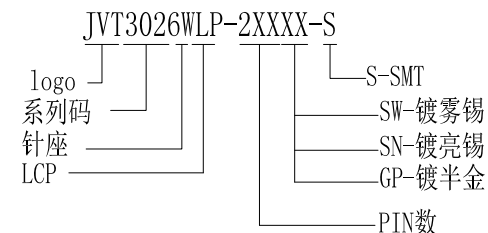

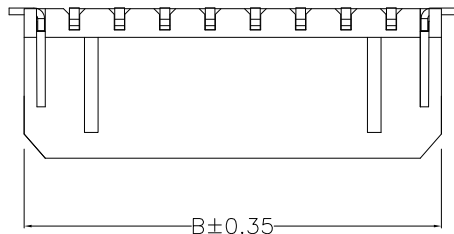


**SPECIFICATION**

- Voltage rating: 250V AC, DC
- Current Rating: 5A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10mΩmax
- Insulation resistance: 1000MΩmin
- After environmental testing: 20mΩmax
- Temperature range: -25°C ~ +85°C

**WAFER**

- Material: Base: LCP UL94V-0
- Mates With Part(s): JVT3025H Crimp Housing and Terminal



**P.C.B. LAYOUT**

| Poles | Dimensions (mm) |       | Poles | Dimensions (mm) |       |
|-------|-----------------|-------|-------|-----------------|-------|
|       | A               | B     |       | A               | B     |
| 2*01  | --              | 6.65  | 2*07  | 18.00           | 24.65 |
| 2*02  | 3.00            | 9.65  | 2*08  | 21.00           | 27.65 |
| 2*03  | 6.00            | 12.65 | 2*09  | 24.00           | 30.65 |
| 2*04  | 9.00            | 15.65 | 2*10  | 27.00           | 33.65 |
| 2*05  | 12.00           | 18.65 | 2*11  | 30.00           | 36.65 |
| 2*06  | 15.00           | 21.65 | 2*12  | 33.00           | 39.65 |

|                    |              |               |                |                        |                      | GENERAL TOLERANCE |  |  |  |
|--------------------|--------------|---------------|----------------|------------------------|----------------------|-------------------|--|--|--|
| JVT3026WLP-2XXSW-S | LCP UL 94V-0 | Brass         | Tin Plated Fog | Brass                  | Tin Plated Fog       | 0 ±0.35           |  |  |  |
| JVT3026WLP-2XXSN-S | LCP UL 94V-0 |               | Tin-Plated     |                        | Tin-Plated           | .0 ±0.30          |  |  |  |
| PART NO            | Material     | Material(Pin) | Finish(Pin)    | Material (Solder Tabs) | Finish (Solder Tabs) | .00 ±0.20         |  |  |  |
|                    |              |               |                |                        |                      | .000 ±0.10        |  |  |  |



|    |      |    |  |    |    |    |     |    |          |
|----|------|----|--|----|----|----|-----|----|----------|
| 版本 | 变更内容 | 日期 |  | 单位 | mm | 比例 | 1:1 | 日期 | 20170724 |
|----|------|----|--|----|----|----|-----|----|----------|

|    |     |     |    |                        |    |   |
|----|-----|-----|----|------------------------|----|---|
| 核准 | 审核  | 绘图  | 品名 | MLX3.0mm 180°WAFER SMT |    |   |
|    | 陈宁亮 | 李勇军 | 料号 | JVT3026WLP-2*XXXX-S    |    |   |
|    |     |     | 图名 | 031                    | 版本 | A |