

250 TYPE FEMALE HOUSING

MATERIAL

Material: PA66






SPECIFICATIONS

Temperature range: -25°C ~ +85°C

Current rating: 15A AC

Voltage rating: 250V AC

Dielectric withstand voltage: 1000V AC

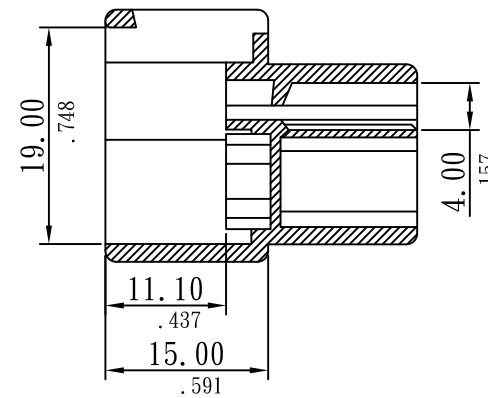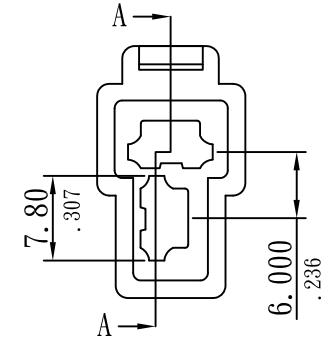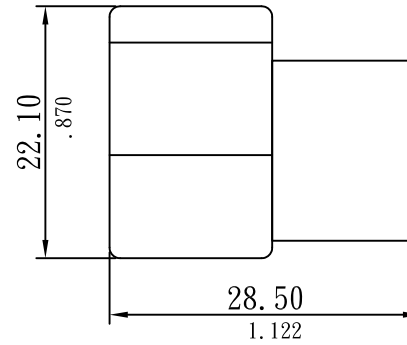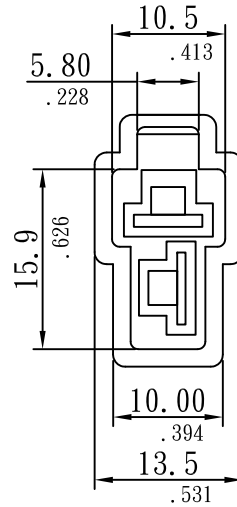

SECA-A



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

PART NO

RM082-RB-2ASL-NL

T016	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	YXF	2009. 12. 09	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	CMM	2009. 12. 09	CAD NO	B				.00 ±0.20(.008)		
APPROVED	MARS	2009. 12. 09	RM082-RB-2ASL-NL	C				.000±0.10(.004)		
									PROJECTION:	