

MICRO USB B RECEPTACLE

MATERIAL

Insulator: LCP+GF
 Color: Grey black
 Contact: Phosphor bronze t=0.20mm
 Contacts plating: Gold plated
 Shell: Stainless t=0.25mm
 Shell plating: Tin plated







SPECIFICATIONS

Temperature range: -30°C ~ +85°C
 Current rating:
 Single line: 1A (Pin 1 to Pin 5).
 2-Line for power: 1.8A (Pin 1 and Pin 5),
 0.5A (Pin 2 to Pin 4).
 Voltage rating: 30V AC
 Dielectric withstanding voltage: 100V AC
 Contact resistance: 0.03Ω Max.
 Insulation resistance: 100MΩ Min.

Order Information

R 2950-MCR-B R-IA-01
 1 2 3 4 5 6

1. RoHS
2. Series No.
3. Micro USB
4. B type
5. Right angle
6. Color: IA=Grey black

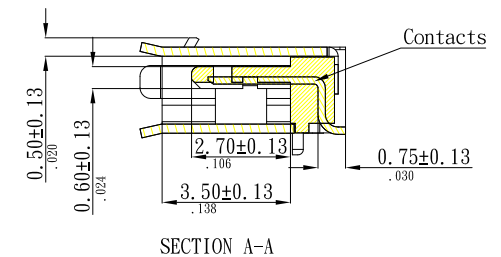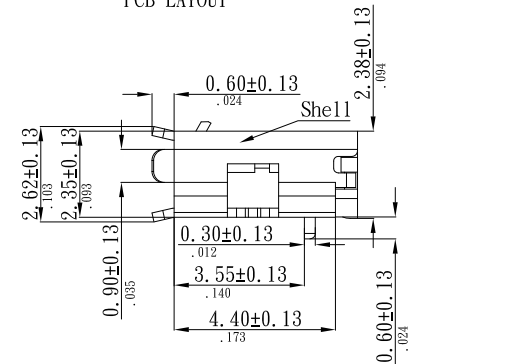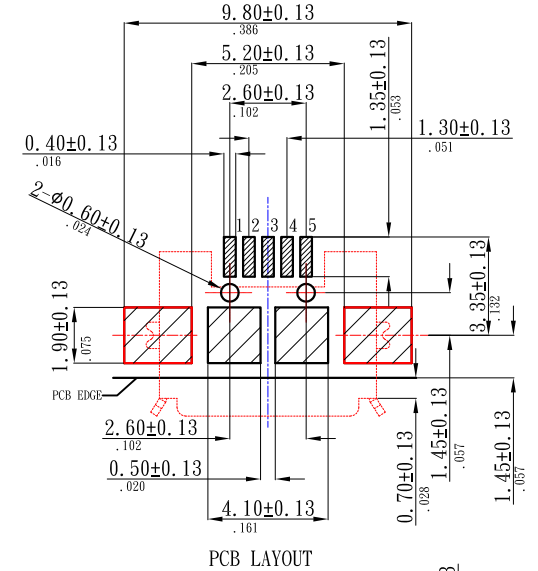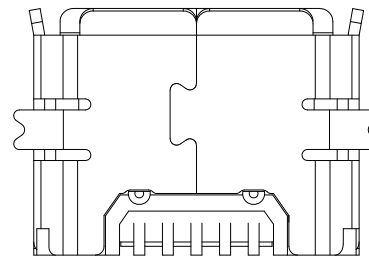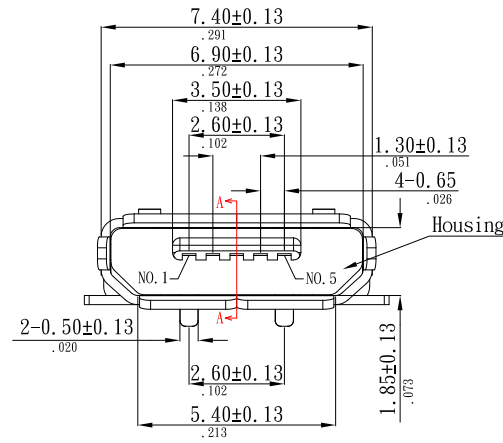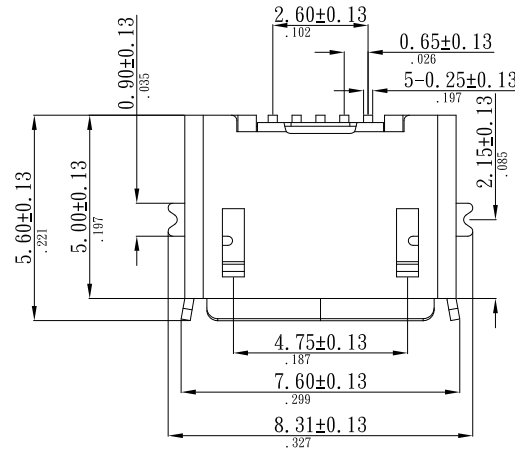

Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M158	NAME	DATE	SCALE: 1:5	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	STEVEN	2013. 08. 22	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	SEAN	2013. 08. 22	CAD NO	B						.00 ±0.20(.008)
APPROVED	TINA	2013. 08. 22	R2950-MCR-BR-IA-01	C						.000±0.10(.004)
PART NO	R2950-MCR-BR-IA-01		APPROVED		TINA		2013. 08. 22		PROJECTION:	