

Datasheet


RS PRO NON-INSULATED RING TERMINALS

Stock number: 178-8592

MAXIMUM ELECTRIC CURRENT:

| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 9 | 12 | 17 | 18 |

TERMINAL MATERIAL: COPPER
SURFACE TREATMENT: TIN PLATED

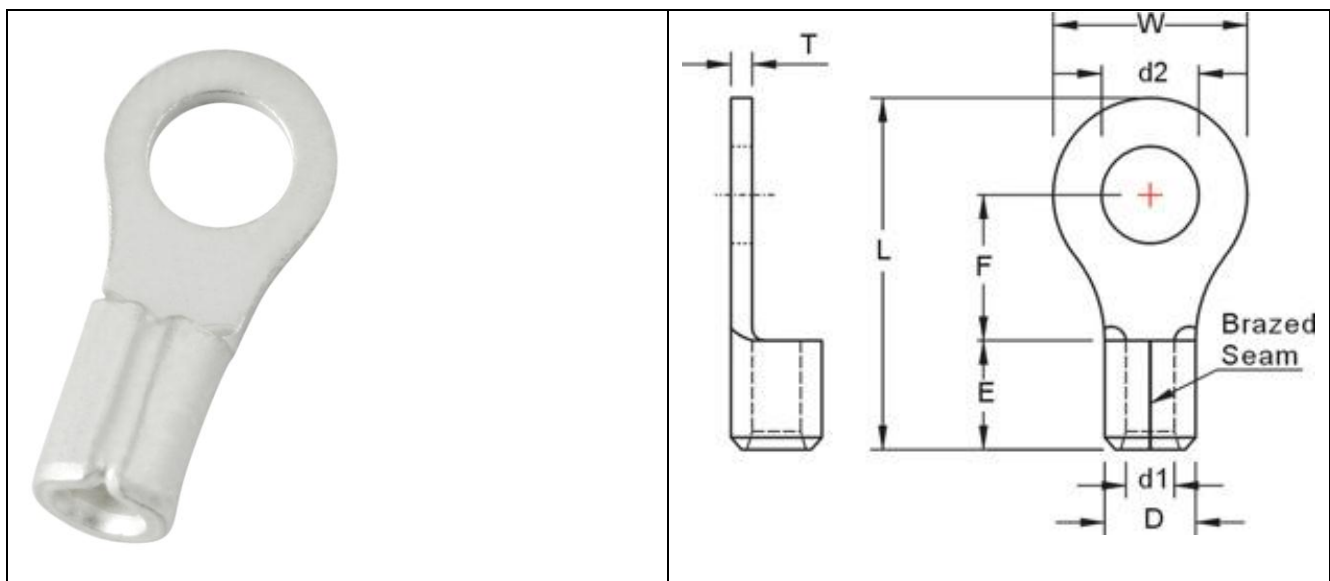

| WIRE RANGE A.W.G. mm ² | ITEM NO. | STUD SIZE | DIMENSION inch(mm) | | | | | | | | |
|---|----------|-----------|--------------------|--------|------|-------|-------|-------|-------|-------|------|
| | | | BRAZED SEAM | 2 x d2 | W | F | L | E | D | d1 | T |
| 22-16 A.W.G. | 178-8592 | #6 | | 0.146 | 0.26 | 0.248 | 0.567 | 0.189 | 0.134 | 0.067 | 0.03 |
| 0.5-1.5 mm ² | | | 3.7 | 6.6 | 6.3 | 14.4 | 4.8 | 3.400 | 1.7 | 0.75 | |