



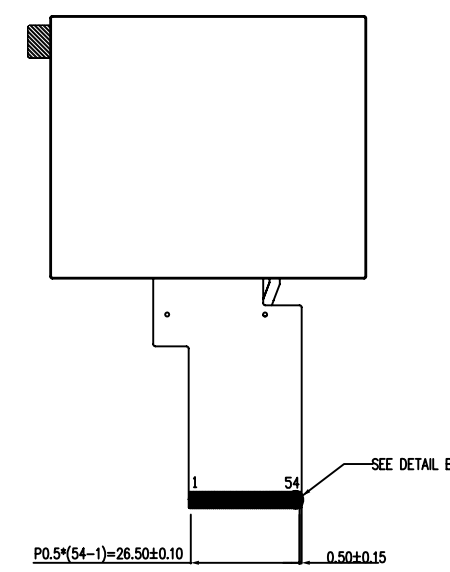
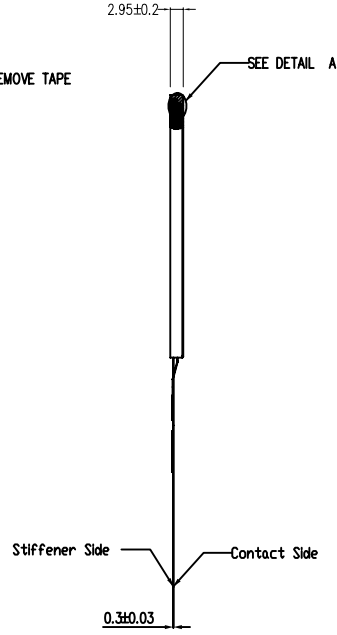


NO.	PIN NAME
1	LED_Cathode
2	LED_Cathode
3	LED_Anode
4	LED_Anode
5	NC
6	NC
7	NC
8	RESET
9	SPENA
10	SPCK
11	SPDA
12	DATA 0
13	DATA 1
14	DATA 2
15	DATA 3
16	DATA 4
17	DATA 5
18	DATA 6
19	DATA 7
20	DATA 8
21	DATA 9
22	DATA10
23	DATA11
24	DATA12
25	DATA13
26	DATA14
27	DATA15
28	DATA16
29	DATA17
30	DATA18
31	DATA19
32	DATA20
33	DATA21
34	DATA22
35	DATA23
36	HSYNC
37	VSYNC
38	DOTCLK
39	NC
40	NC
41	VDD
42	VDD
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	DEN
53	GND
54	GND

NOTES:

- 1.DISPLAY TYPE: a-Si TFT
- 2.DISPLAY MODULE: Transmissive ,Normally White
- 3.OPERATIN TEMP: -20° C---+70° C
- 4.STORAGE TEMP: -30° C---+80° C
- 5.Backlight: LED
6. RoHS Complicant

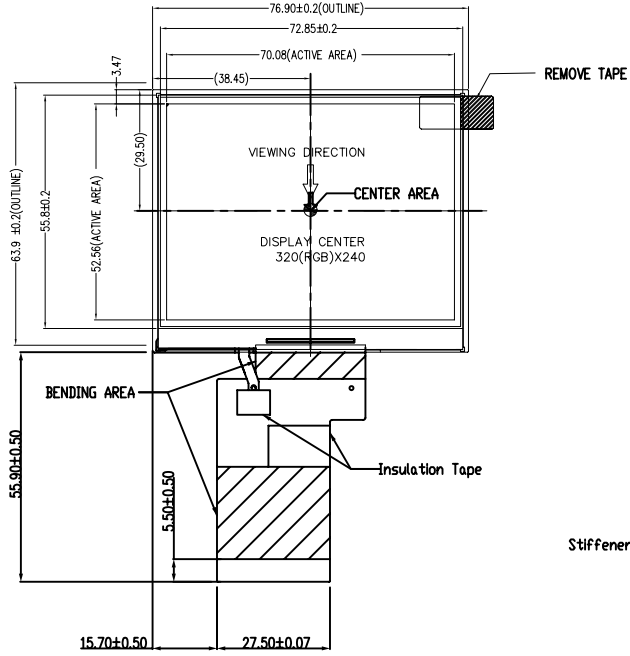

<p>DLC Display Co., Limited www.dlcdisplay.com</p>		
DRAWN BY:	TITLE: DLC0350AZG	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	DWG NO:	SHEET NO: 0F