

F R A O 1 2

S E R I E S

8 ~ 15 Watts Single Output AC-DC Adaptor WallMount Type

FEATURES

- Universal input, wall mount style
- Interchangeable plug type - kit sold separately
- Single output 8~15W, anywhere output voltage 3~27VDC
- No load power consumption (@no load) < 0.075W
- Comply with EISA 2007 / DoE 6 & EU ErP and CoC 5

SPECIFICATIONS

Input Voltage Range..... 90~264VAC
 Input Current (rms)..... 0.4A Max.
 Output Voltage.....(Any where output voltage)..... 3 ~ 27VDC
 Efficiency..... 80.5% typ. at full load *
 Voltage Regulation..... ± 5% max.
 Max Power..... 15W
 Withstand Voltage..... I/P-O/P: 3000 VAC
 Operating Temperature..... -10°C ~ +60°C
 (derated linearly from 100% load @ 40°C to 50% load @ 60°C)
 Storage Temperature..... -20°C ~ 85°C
 Operating Humidity..... 20% to 90% RH
 Protections..... Short Circuit, OVP, OLP
 Safety Standard..... IEC/UL/EN 60950-1, CE, CB
 EMC Standard..... (EN55022, CISPR22, FCC Part 15) class B,
 EN61000-3-2, 3, EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024
 Standard output connector..... DC barrel jack
 Standard output cable / length...UL2468 1.5M (1.0M for 12V or lower)

* This data is taken after 30 mins. burn-in ; except 3.3V
 All specifications are typical at nominal line, full load and 25°C,
 unless otherwise noted.




Model Number	Output Voltage (VDC)	Output Current (A)	Output Max. Watts	EFF. Level
FRA012-S03-x	3~5	2.67~1.60	8W	
FRA012-S05-x	5~6	2.00~1.67	10W	VI
FRA012-S07-x	6~8	1.67~1.25	10W	VI
FRA012-S09-x	8~11	1.50~1.09	12W	VI
FRA012-S12-x	11~13	1.09~0.92	12W	VI
FRA012-S15-x	13~16	0.92~0.75	12W	VI
FRA012-S18-x	16~21	0.94~0.71	15W	VI
FRA012-S24-x	21~27	0.71~0.56	15W	VI
FRA012-S120-x	12	1.25	15W	VI

Ordering Information:

x= AC Plug Type code

x	Wall Mount Plug	x	Wall Mount Plug	x	Wall Mount Plug
A	Australian plug	B	British plug	C	China plug
E	EU plug	U	US plug		
I	Interchangeable Type [IA. IB. IC. IE. IU AC plug available]				

MECHANICAL DRAWING (Unit: mm)

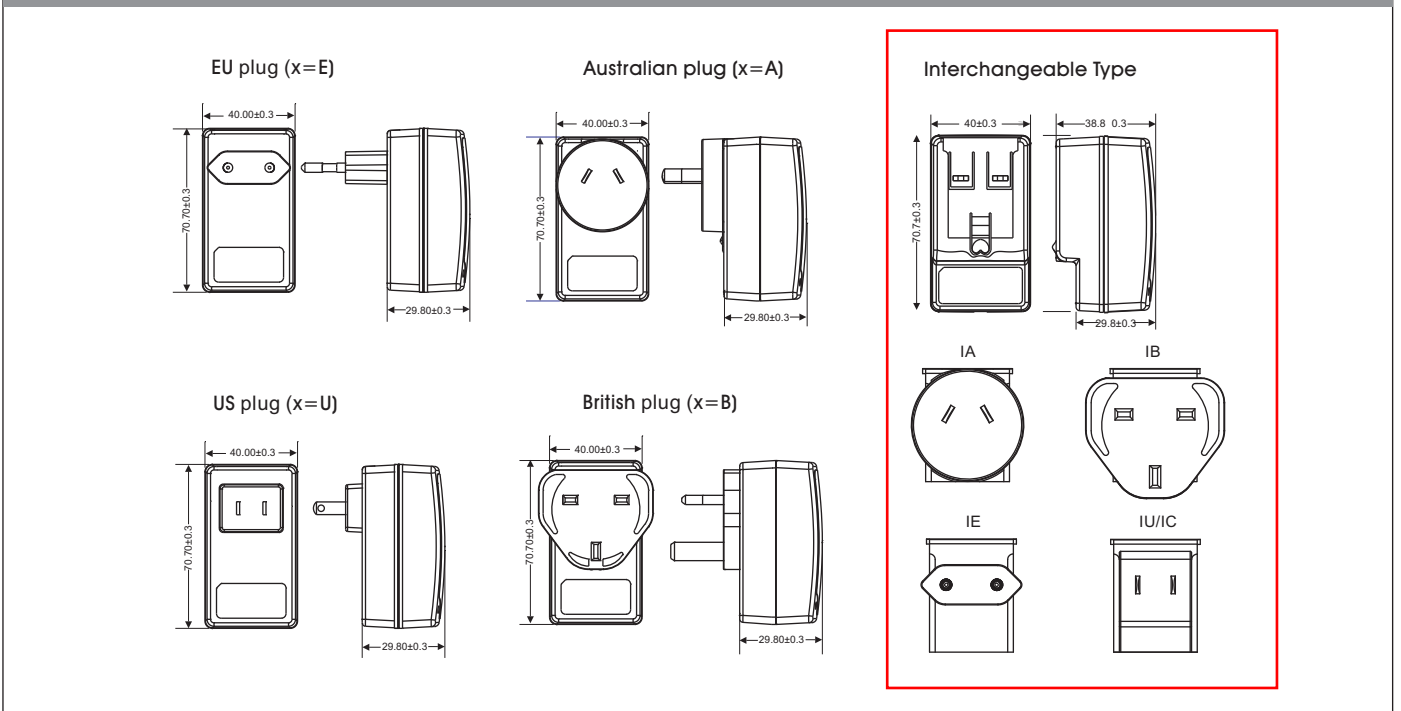

WallMount Adaptor