


REV	DESCRIPTION:	DATE

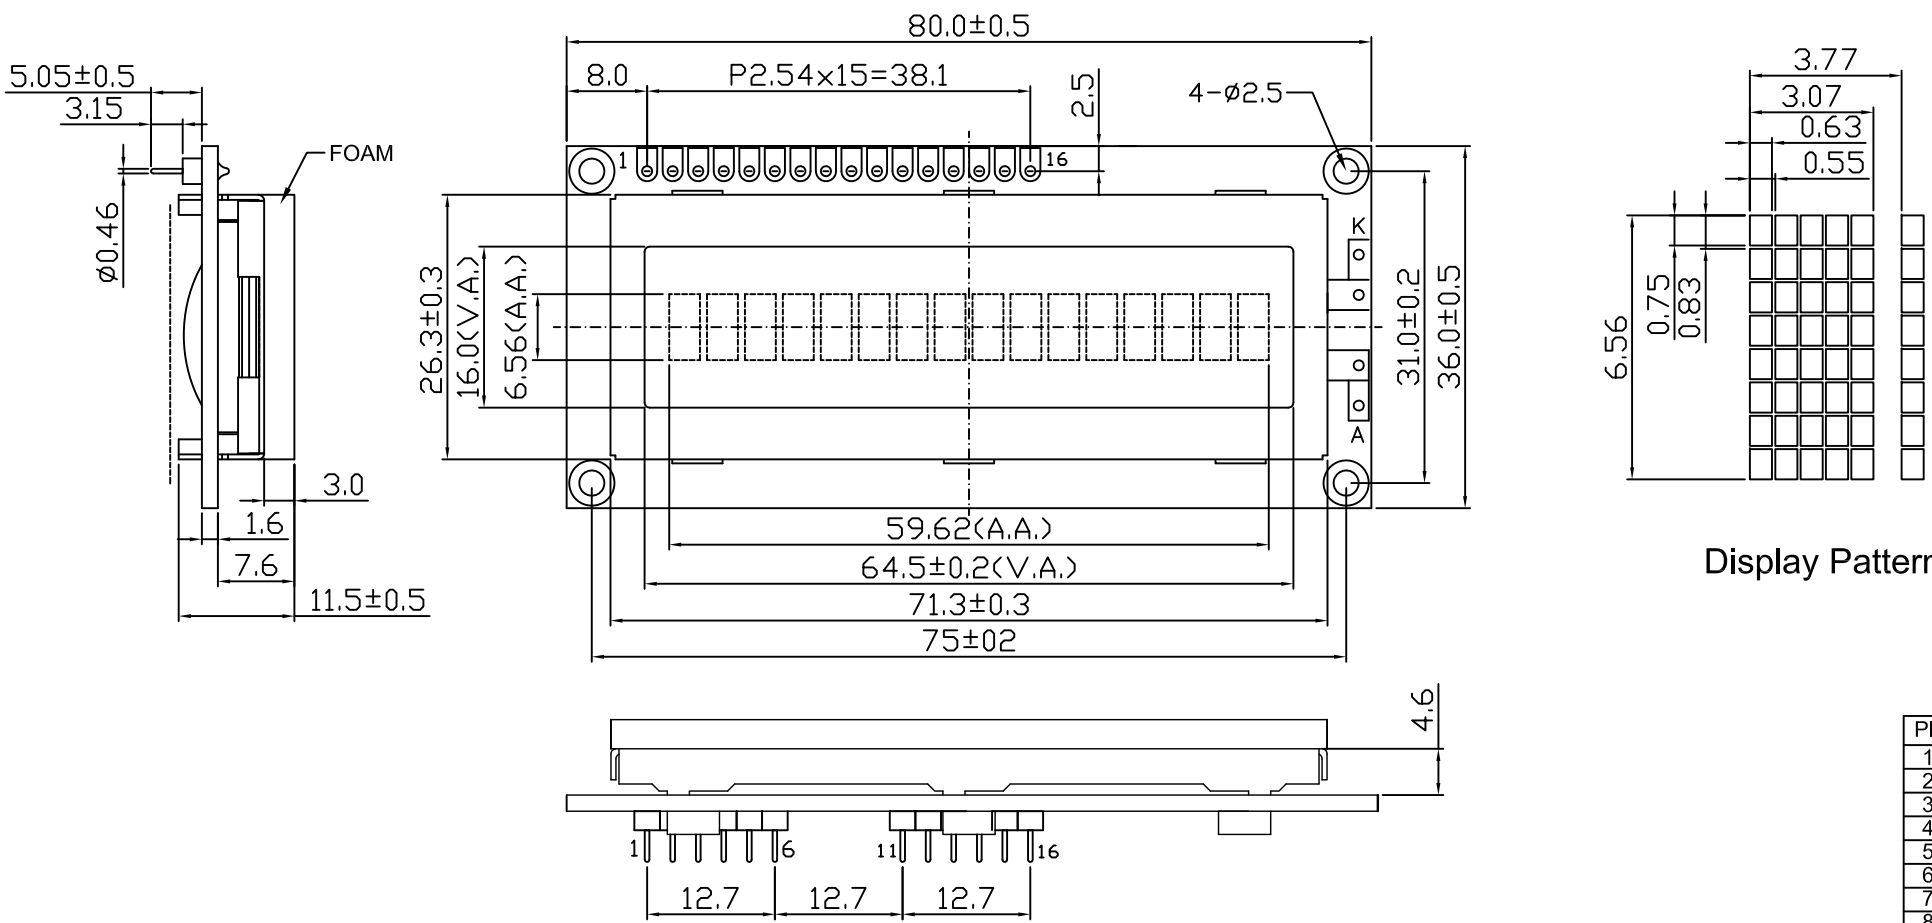

- FEATURE:
1. DISPLAY TYPE: FSTN, TRANSFLECTIVE/POSITIVE.
 2. DRIVING METHOD: 1/16 DUTY, 1/5 BIAS, $V_{LCD}=4.5V$
 3. VIEWING DIRECTION: 6:00.
 4. BUILT-IN DRIVER: ST7066U-0A.
 5. LOGIC SUPPLY VOLTAGE: $V_{DD}=5.0V$.
 6. BACKLIGHT: LED SIDELIGHT, WHITE COLOR.
 7. BACKLIGHT DRIVING: $V_F=5.0V$, $I_F=40mA$.
 8. OPERATING TEMPERATURE: $-20^{\circ}C \sim 70^{\circ}C$.
STORAGE TEMPERATURE: $-30^{\circ}C \sim 80^{\circ}C$.
 9. ROHS COMPLIANCE.

PIN	SIGNAL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED+
16	LED-

MODEL NO.: GDM1601M-FSW-FBW-P/Z4.6			
NAME	DATE	UNLESS OTHERWISE STATED TOLERANCES: XX.X ±0.20 X.X ±0.10	SCALE:
DRAWN: LIN	MAY 5, 2020	SIZE: A4	UNIT: mm
CHECKED:		APPROVED:	PAGE: 1-1