

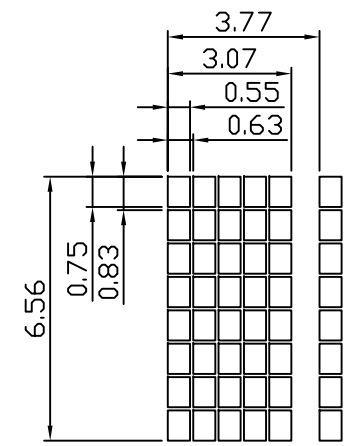


1	2	3	4	5	6
REV		DESCRIPTION:			DATE

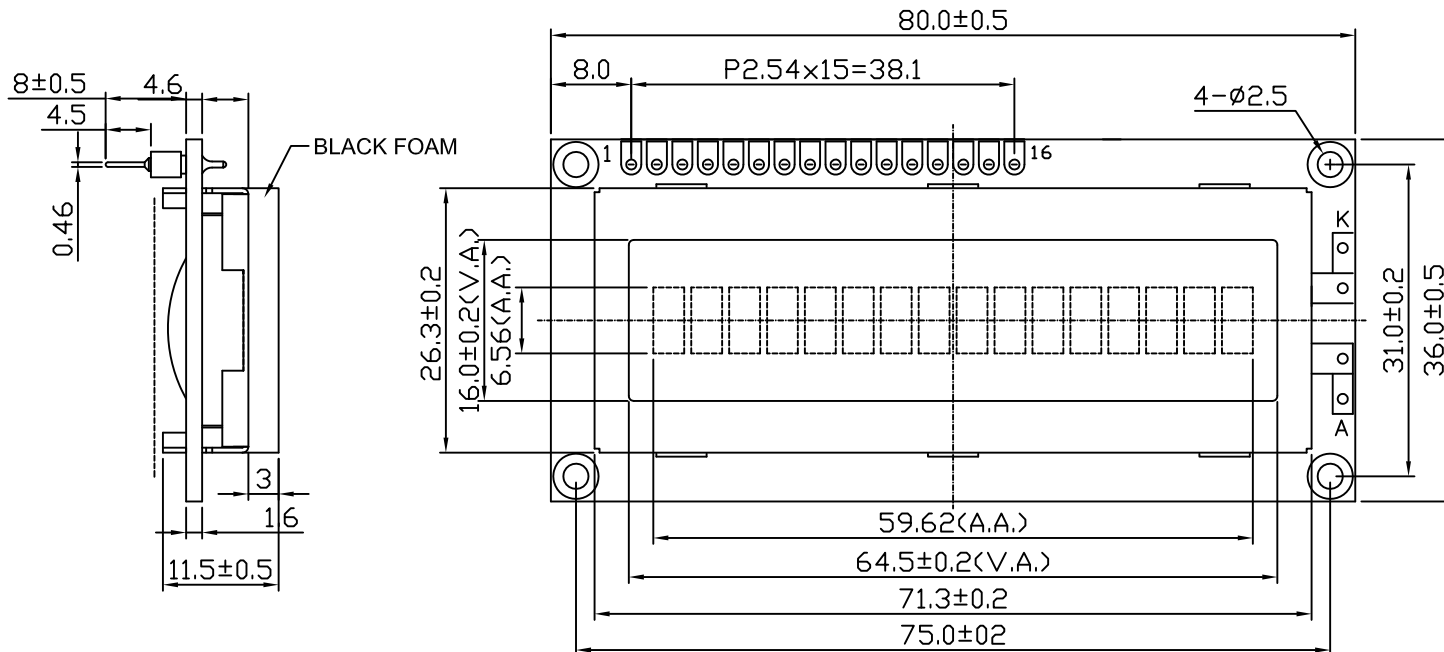

Display Pattern

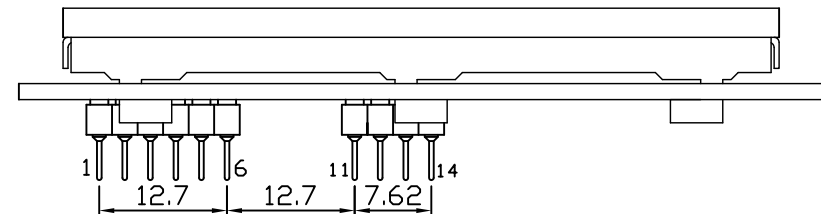

PIN	SIGNAL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	-
16	-

- FEATURES:
1. DISPLAY TYPE: HTN/POSITIVE/REFLECTIVE
  2. DRIVING: 1/16 DUTY, 1/5 BIAS,  $V_{LCD}=4.5V$
  3. VIEWING DIRECTION: 6 O'CLOCK
  4. BUILT IN CONTROLLER: ST7066U-0A
  5. LOGICAL POWER SUPPLY:  $V_{DD}=4.5V$
  6. OPERATING TEMPERATURE:  $-20^{\circ}C \sim 70^{\circ}C$   
STORAGE TEMPERATURE:  $-30^{\circ}C \sim 8^{\circ}C$
  7. ROHS COMPLIANCE

Model NO.:		GDM1601M-RN-HBW-P			
NAME	DATE	UNLESS OTHERWISE STATED TOLERANCES:		SCALE:	
DRAWN: LIN	MAR.22.2014	XX.X ± 0.20 X.X ± 0.10			
CHECKED:		SIZE:	A4	UNIT:	PAGE:
APPROVED:				mm	1-1