

# HF32FA

# SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:40006182



File No.:CQC170021755721



## Features

- 5A switching capability
- Creepage/clearance distance > 8mm
- 5kV dielectric strength (between coil and contacts)
- 1 Form A meets VDE 0700, 0631 reinforce insulation
- 1 Form C meets VDE 0631 reinforce insulation
- UL insulation system: Class F
- Product in accordance to IEC 60335-1 available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: 17.6mm x 10.1mm x 12.3 mm

## CONTACT DATA

Contact arrangement	1A, 1C	
Contact resistance <sup>1)</sup>	70mΩ max.(at 1A 6VDC)	
Contact material	AgNi	
Contact rating (Res. Load)	1A	1C
	Standard/Sensitive	Standard
	5A 250VAC 5A 30VDC	3A 250VAC 3A 30VDC
Max. switching voltage	250VAC / 30VDC	
Max. switching current	5A	
Max. switching power	1250VA / 150W	
Mechanical endurance	1 x 10 <sup>6</sup> OPS	
Electrical endurance	H type: 1 x 10 <sup>5</sup> OPS (5A 250VAC, Resistive load, Room temp., 1.5s on 1.5s off)	
	Z type: 1 x 10 <sup>5</sup> OPS (NO/NC, 3A 250VAC, Resistive load, Room temp., 1.5s on 1.5s off)	

Notes: 1) The data shown above are initial values.

## CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at nomi. volt.)	8ms max.	
Release time (at nomi. volt.)	4ms max.	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Shock resistance*	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance*	NO	10Hz to 55 Hz 1.65mm DA
	NC	10Hz to 55 Hz 0.6mm DA
Termination	PCB	
Unit weight	Approx.4.6g	
Construction	Plastic sealed, Flux proofed	

Notes: 1) \*Index is not in relay length direction.

2) The data shown above are initial values.

3) Please find coil temperature curve in the characteristic curves below.

## COIL

Coil power	Sensitive: Approx. 200mW; Standard: Approx. 450mW
------------	--

## COIL DATA

at 23°C

### Standard type

Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC <sup>2)</sup>	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48 <sup>2)</sup>	36.0	2.40	62.4	5120 x (1±10%)

### Sensitive type (Only for 1 Form A)

Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC <sup>2)</sup>	Coil Resistance Ω
3	2.25	0.15	5.1	45 x (1±10%)
5	3.75	0.25	8.5	125 x (1±10%)
6	4.50	0.30	10.2	180 x (1±10%)
9	6.75	0.45	15.3	400 x (1±10%)
12	9.00	0.60	20.4	720 x (1±10%)
18	13.5	0.90	30.6	1600 x (1±10%)
24	18.0	1.20	40.8	2800 x (1±10%)

Notes: 1) The data shown above are initial values.

2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

3) For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

## SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	5A 250VAC 5A 30VDC 1/8HP 125VAC/250VAC TV-2 C300
	1 Form C	3A 250VAC 3A 30VDC
VDE		5A 250VAC at 85°C 2A 250VAC cosφ=0.5 at 85°C 1 Form A, Sensitive: 3A 400VAC at 85°C

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2018 Rev. 1.00


## ORDERING INFORMATION

<b>HF32FA / 012 -H S L 1 G (XXX)</b>	
<b>Type</b>	
<b>Coil voltage</b>	3, 5, 6, 9, 12, 18, 24, 48VDC
<b>Contact arrangement</b>	<b>H:</b> 1 Form A <b>Z:</b> 1 Form C
<b>Construction<sup>1)2)</sup></b>	<b>S:</b> Plastic sealed <b>Nil:</b> Flux proofed
<b>Coil power</b>	<b>L:</b> Sensitive (Only for 1 Form A) <b>Nil:</b> Standard
<b>Termination</b>	<b>1:</b> Type 1 <b>2:</b> Type 2
<b>Contact plating<sup>3)</sup></b>	<b>G:</b> Gold plated <b>Nil:</b> No gold plated
<b>Special code<sup>4)</sup></b>	<b>XXX:</b> Customer special requirement <b>Nil:</b> Standard

- Notes:** 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc).
- 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 3) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC.
- 4) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

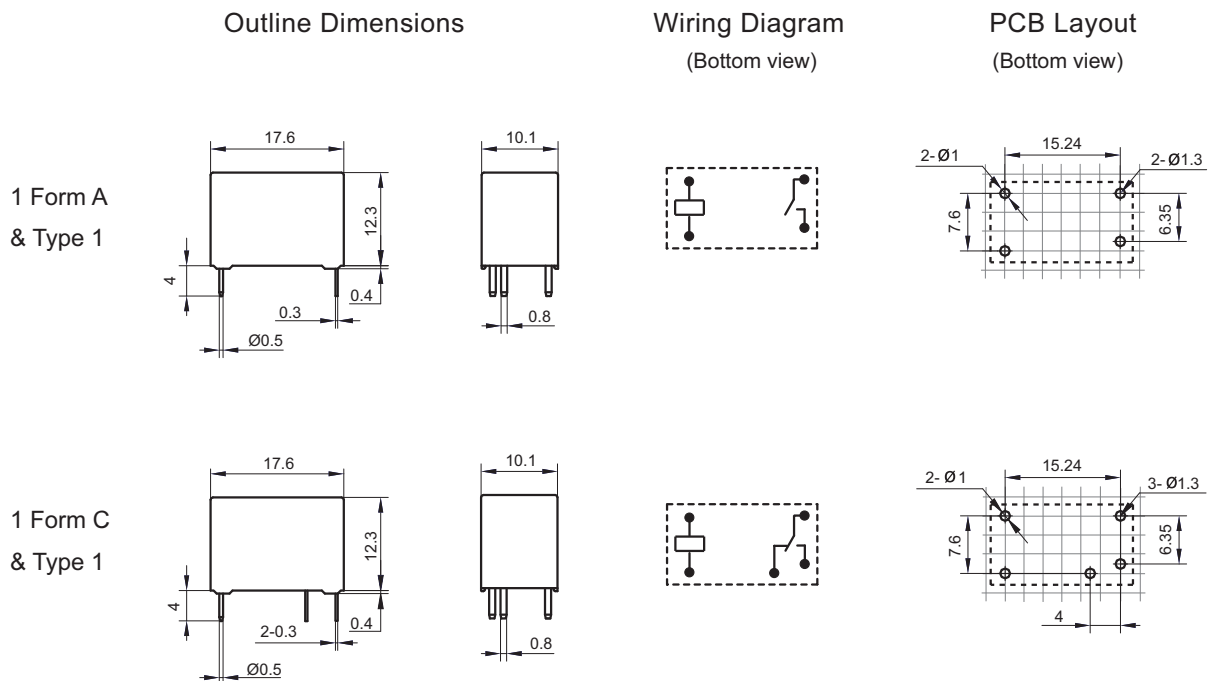


# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

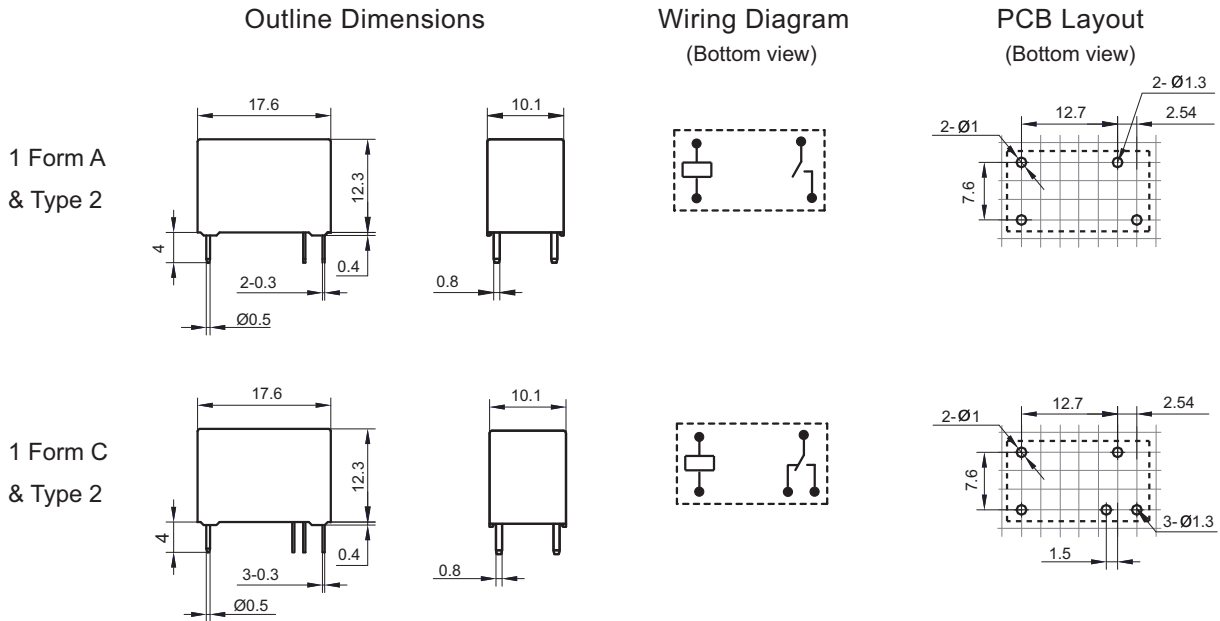

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.  
 3) The width of the gridding is 2.54mm.

## CHARACTERISTIC CURVES

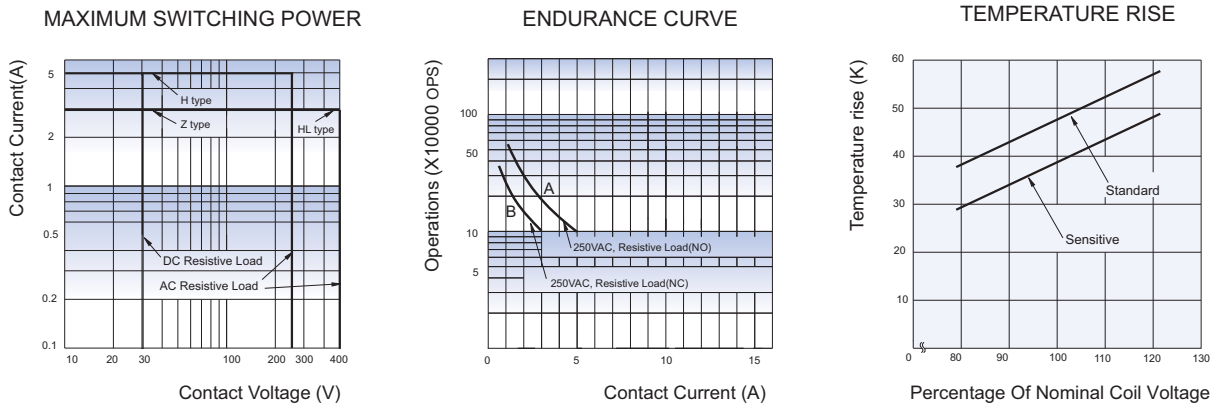

**Notes:**  
 1) Curve A: H type,  
 Curve B: Z type  
 2) Test conditions: Flux proofed,  
 Room temp., 1.5s on 1.5s off.

### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.