
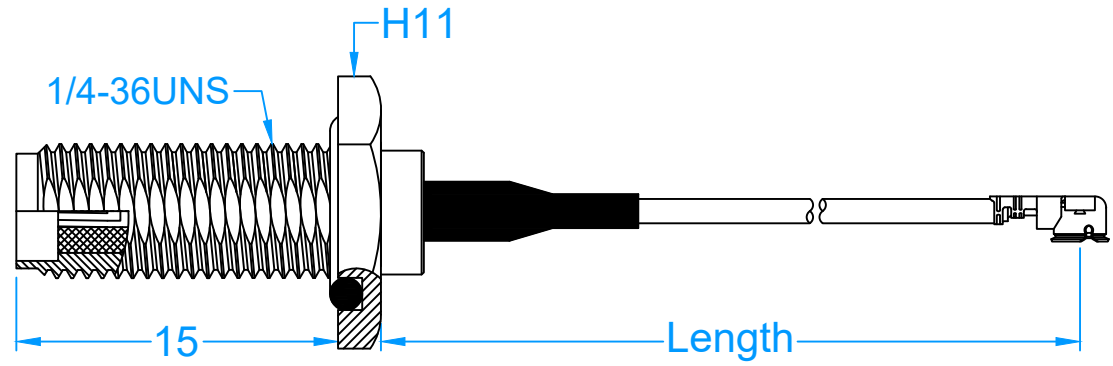


RECOMMENDED
PANEL CUTOUT



Part Number	Length (IN)	Length (MM)
KM-020241-0050	1.968±0.15	50±4
KM-020241-0100	3.937±0.15	100±4
KM-020241-0150	5.905±3%	150±3%
KM-020241-0200	7.874±3%	200±3%
KM-020241-0250	9.842±3%	250±3%

- Orient IPEX interface with respect to SMA 'D FLAT' as shown within ± 10°.
- Connector orientation for cable length less than 100mm only.
- Additional lengths can be provided by changing XXXX to desired length in MM, or XXX in INCH, or XXM in METER.

4	Heat Shrink Tube	1	Black
3	IPEX MHF Plug	1	20278-112R-13
2	IP67/68 SMA (F) BHD Jack	1	KM-010136
1	Coaxial Cable	1	1.13mm
No.	Specification	QTY	Description

**RoHS
Compliant**

THIRD ANGLE PROJECTION

* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES	SCALE	1:1	UNIT	MM
---	-------	-----	------	----

APPROVED JOHN
CHECKED TERRY
DRAWN KEVIN
DRAWN DATE Sep. 26, 2019

KM KeMy Electronic Technology Inc.	
TITLE IP67/68 SMA (F) BHD Jack - 1.13mm - IPEX MHF Plug, Various Lengths	
DRAWING NO. KM-020241-XXXX	REV B