



# INTERCOM

## FEATURES

Single and double crimp connector.  
 Conforms to HE13, HE14, IEC 603-8.  
 Double Wipe Removable contact.  
 AWG 22 - 24 - 26 - 28.

## TECHNICAL DATA

**Material**  
 Housing: black glass filled polyester UL94 V0.

## Electrical

Current rating: 3 A maxi.  
 Voltage: 500 V eff.  
 Insulation resistance:  $1 \times 10^5$  M $\Omega$  mini.  
 Contact resistance: 20 m $\Omega$  maxi.

## Mechanical

Temperature rating: -55°C to +125°C  
 Maximum Insulation  
 Diameter:  $\varnothing$  1.45 mm  
 Insertion force:  
 Tin version: 3 N Maxi per contact  
 Gold version: 1.5 N maxi per contact



## Withdrawal force:

Tin version: 0.2 N mini per contact  
 Gold version: 0.15 N mini per contact

## PACKAGING

Recyclable cardboard boxes.

Tooling P/n: Crimping.

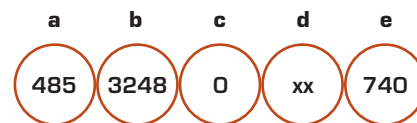

**d** Number of contacts from 02 to 20.

Housing to be used with contacts:  
 485 3250 000 4xx

