


1

2.0*No.of Contacts/2 ±0.30

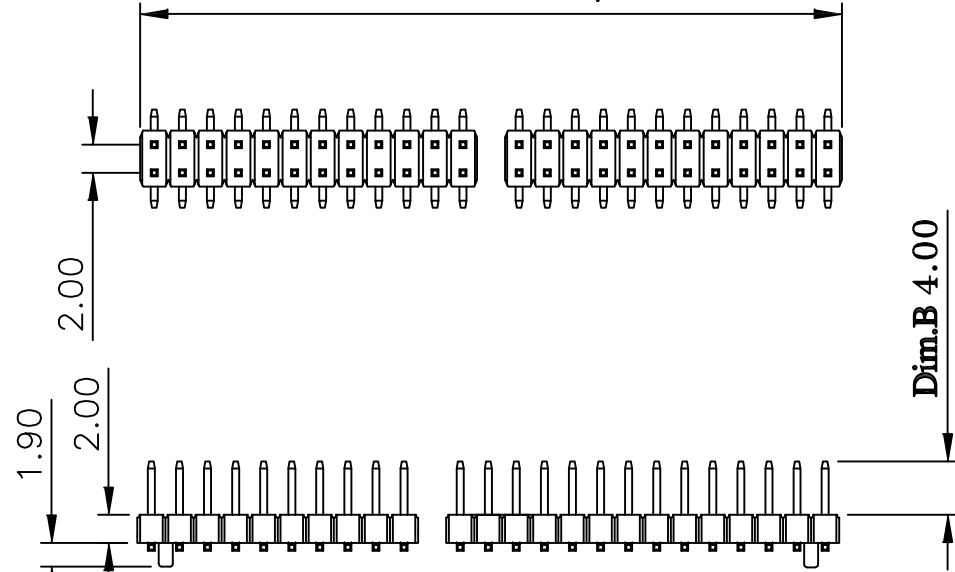

Dim.B 4.00

2.0 * No.of Contacts/2 -4.00

Dim.A 6.20


2

SPECIFICATION


Current Rating: **2 Amps**
 Insulator Resistance: **1000 Megohms min**
Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: **-40° ~ +85° C**
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: **260° C for 10 seconds**
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Finish: Tin,Gold Plated
 Standard: Gold Flash all over

3


2.0*(No.of Contacts/2-1)

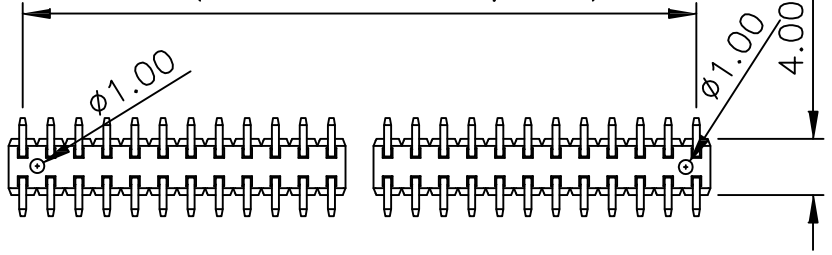

Dim.C 2.50

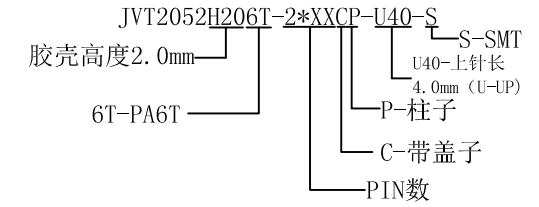

Recommended P.C. Board
SMD Layout

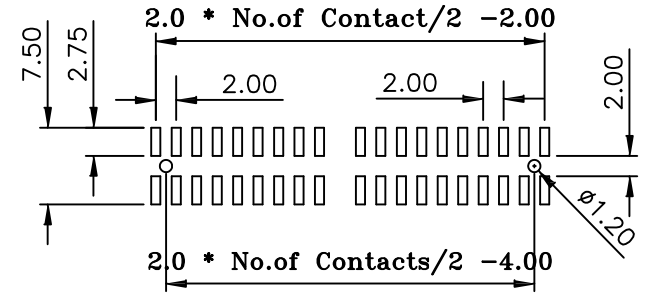

4

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20141214
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	2.0mm排针H2.0 双排 带盖带柱 SMT
	陈宁亮	李勇军	料号	JVT2052H206T-2XXCP-U40-S
			图名	004 版本 A