
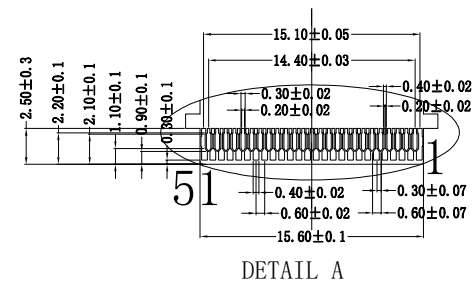
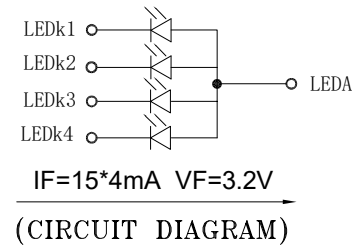
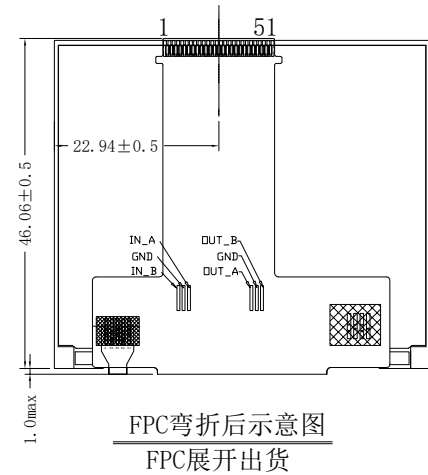
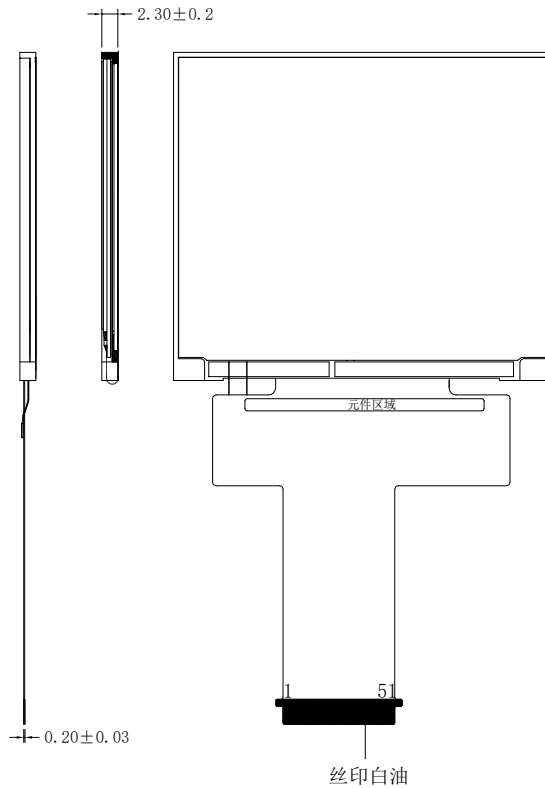


PIN DESCRIPTION

NO	SYMBOL	NO	SYMBOL
1	GND	27	DB7 (G3)
2	IN_B	28	DB6 (G2)
3	IN_A	29	DB5 (B7)
4	GND	30	DB4 (B6)
5	LEDA	31	DB3 (B5)
6	LEDK1	32	DB2 (B4)
7	GND	33	DB1 (B3)
8	VCC	34	DB0 (B2)
9	IOVCC	35	GND
10	GND	36	DIN/SDA
11	/RESET	37	SCL
12	VSYNC	38	CSX
13	HSYNC	39	GND
14	DOTCLK	40	XR
15	ENABLE	41	YD
16	GND	42	XL
17	DB17 (R7)	43	YU
18	DB16 (R6)	44	NC
19	DB15 (R5)	45	LEDK2
20	DB14 (R4)	46	LEDK3
21	DB13 (R3)	47	LEDK4
22	DB12 (R2)	48	NC
23	DB11 (G7)	49	OUT_A
24	DB10 (G6)	50	OUT_B
25	DB9 (G5)	51	GND
26	DB8 (G4)		

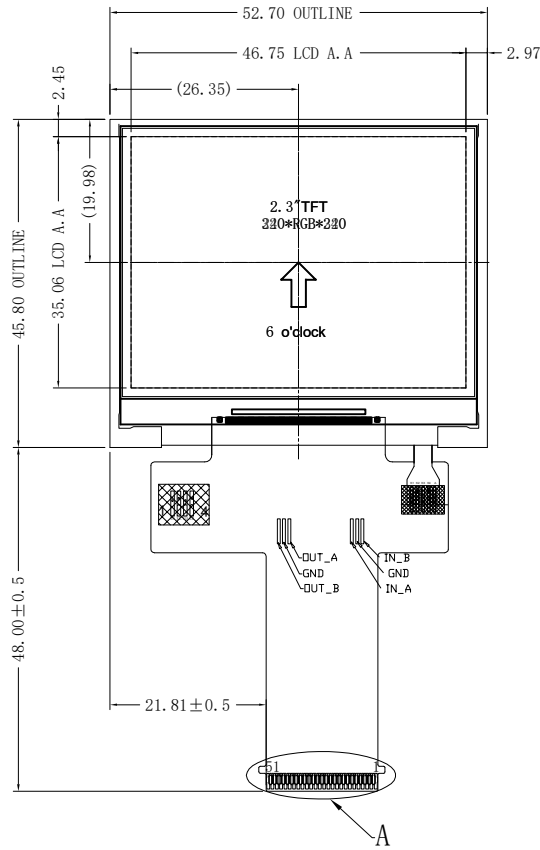

NOTE:

- 1 DISPLAY TYPE : 2.3" QVGA TFT
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 LCD DRIVER : ILI9342C
- 4 OPERATING TEMP : -20° C---+70° C
- 5 STORAGE TEMP : -30° C---+80° C
- 6 UNSPECIFIED TOLERANCE ± 0.2mm

DLC Display Co., Limited

www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0230AZS-2
CHECKED BY:	DWG NO:
APPROVED BY:	DWG NAME:
CONFIRMED BY:	