

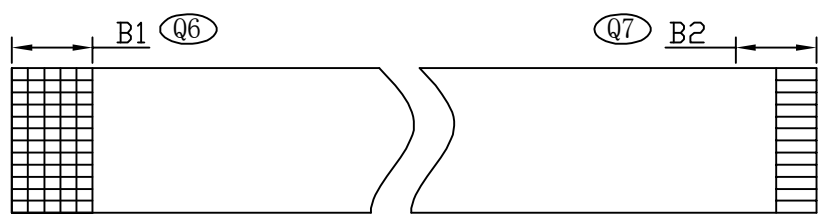
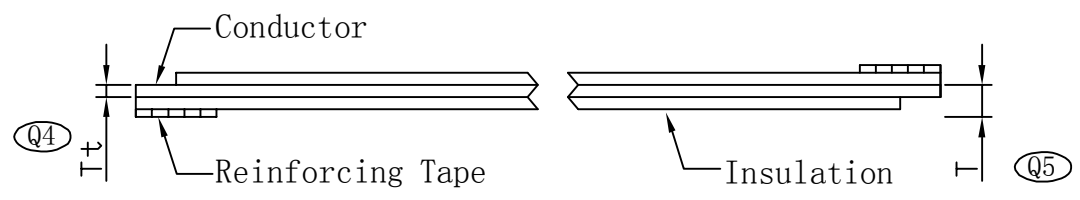


更改為正反方向	2016-09-30	A1
---------	------------	----

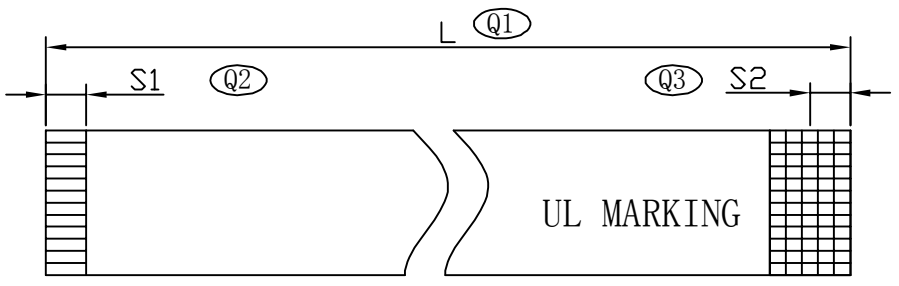

SUPPORTING TAPE: POLYSESTER, COLOR: GREEN  
 CORD CABLE COLOR: WHITE

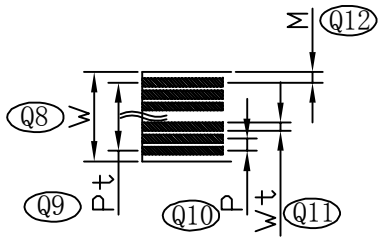

DETAIL OF TERMINAL

项 目 ITEM	符 号 Denotion	尺寸规格 Dimension spec
导体数 Number of Conductor	N	6
导体中心距 Pitch	P	0.5±0.03
排线边宽 Edge Width	M	0.5±0.05
排线宽度 Total Width	W	3.5±0.1
线间距 Total Pitch	Pt	2.5±0.08
端子长度 Strip length	S1	3.0±1
端子长度 Strip length	S2	3.0±1
补强板长度 Supporting length	B1	5.0±1
补强板长度 Supporting length	B2	5.0±1
总长度 Total length	L	50±3MM
端末厚度 TERMINAL Thickness	T	0.3±0.05
导体厚度 Conductor Thickness	Tt	0.035±0.005
导体宽度 Conductor Width	Wt	0.3±0.03
电线规格 Planting	镀锡 (Sn)	

NOTE:

1. UL STYLE: 20624, VW-1
2. FILM COLOR: WHITE, PRINTING
3. RATING: MAX VLLTAGE FOR CONTINUOUS USE 60V  
MAX TEMP. 80° C
4. (Q) MARKS ARE MAJOR INSPECTION ITEM
5. CUSTOMER P/N :
6. CONDUCTIVITY : NO SHORT CIRCUIT OR MISS CONDUCTION
7. INFLAMMABILITY : AFTER TO LEAVE 62° C 120H
8. CONDUCTOR RESISTANCE : 2.00 Ω/M Max
9. INSULATION RESISTANCE : 200M Ω/M Min
10. ALL OF OUR RAW MATERIAL ARE COMPLIED TO HSF

 <b>金涑连接有限公司</b> <b>KING LAI ELECTRONIC CO., LTD</b>		
	UNIT: mm	TITLE:
	SHEET: X/1	名称 FFC 6P 0.5MM 正反 CABLE L=50MM
DRAWN BY: 制图	DIANA	CUSTOHER: 客户 妙昌科技
CHECK BY: 审核		CUSTOHER P/N: 客户编号
APPROVED BY: 核准	EDITION: 版本 A1版	DRAWING NO. : 图号 KL-MC1509-0103