


Meets MIL-C-39012, CECC 22110, IEC60169-15. Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-3GHz
Working Voltage	335V r.m.s	Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ	Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.2
Durability	≥500 cycles	Temperature Range	-55°C to 155°C

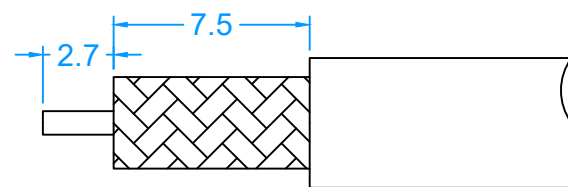

CABLE TRIMMING DIMS

6	Ferrule	1	Brass	Nickel
5	Pin	1	Brass	Gold
4	Gasket	1	Silicone	Natural
3	Rotate-ring	1	Beryllium Bronze	Natural
2	Insulator	2	PTFE	Natural
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish
8				
7				
6				

RoHS Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN
CHECKED
HUANG
DRAWN
SUSAN
DRAWN DATE
July 01, 2012

KM KeMy Electronic Technology Inc.
TITLE
SMA (M) ST Plug, Crimp, for LMR200
DRAWING NO. **KM-010137-200**
REV
0